A12B23HTBMT0

high temperature resistant AC fans

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US



Axial fans provide forced-air cooling solution to temperaturesensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data			
APPROVALS			
Approvals	CE; cURus; UKCA		
PERFORMANCE			
Max Airflow	150/175	m³/h	
	88/103	CFM	
Max Static Pressure	64/60	Pa	
	0.26/0.24	in H2O	
RPM	2700/3100	RPM	
ELECTRICAL DATA			
Rated Voltage	230	V a.c.	
Rated Current	0.1/0.09	A	
Rated Power	17/15	W	
Operating Voltage	207-253	V a.c.	
Frequency	50/60	Hz	
Appliance Class	I		
Insulation Class	F		
Motor Protection	Impedance Protected		
MECHANICAL DATA			
Bearing	Ball Bearing		
GENERIC DATA			
Casing Material	Die-Casting Aluminium		
Airflow Direction	Air exhaust over brackets		

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



A12B23HTBMT0

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

Technical data		
Electrical Connection	Fast-On 3x0,5mm	
Life Expectancy	40000	h at 40 °C
	40000	h at 104 °F
Fan Noise	42/46	dB(A)
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP44	
Operating Temperature	-40÷90	°C
	-40÷194	°F
Storage Temperature	-40÷90	°C
	-40÷194	°F
UL DATA		
UL File Number Recognized Component	E223195	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



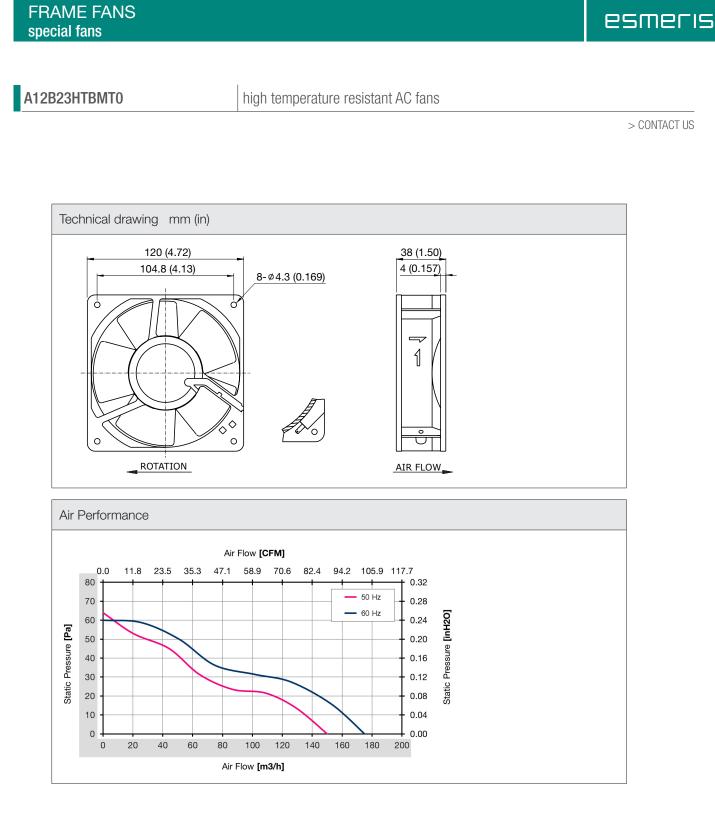


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

