A12B23STBA00

AC axial fans

> CONTATTACI



Axial fans provide forced-air cooling solution to temperature-sensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA; TÜV	
PERFORMANCE		
Max Airflow	163/182	m³/h
	96/107	CFM
Max Static Pressure	60/62	Pa
	0.24/0.25	in H2O
RPM	2400/2600	RPM
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.17/0.13	А
Rated Power	21/21	W
Operating Voltage	220-240	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Impedance Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Casing Material	Die-Casting Aluminium	
Life Expectancy	50000	h at 40 °C
	50000	h at 104 °F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla



A12B23STBA00

AC axial fans

> CONTATTACI

Technical data			
Airflow Direction	Air exhaust over brackets		
Electrical Connection	Fast-On 3x0,5mm		
Fan Noise	46.4/48.1	dB(A)	
Fixing System	Screws		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP20		
Operating Temperature	-10÷70	°C	
	14÷158	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	
UL DATA			
UL File Number Recognized Component	E223195		


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla



A12B23STBA00

AC axial fans

> CONTATTACI

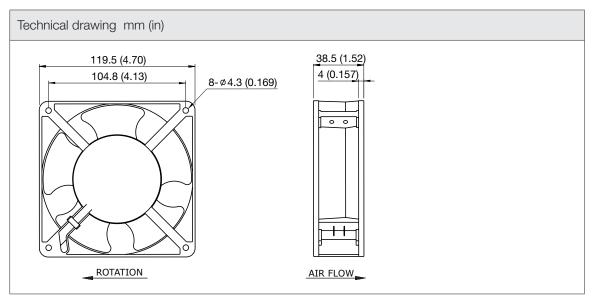

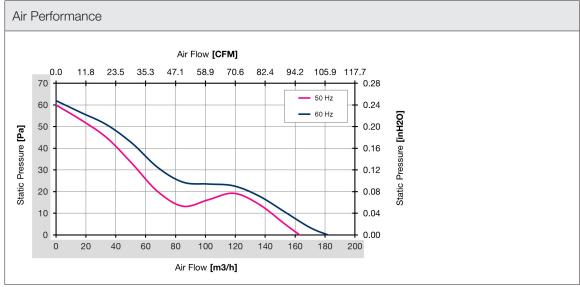


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

