D12B05SWBZ00

DC axial fans

> CONTACT US



Axial fans provide forced-air cooling solution to temperature-sensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Max Airflow	204	m³/h
	120	CFM
Max Static Pressure	83	Pa
	0.33	in H2O
RPM	3200	RPM
ELECTRICAL DATA		
Rated Voltage	24	V d.c.
Rated Current	0.4	А
Rated Power	9.6	W
Operating Voltage	21.6-26.4	V d.c.
Starting Voltage	17	V d.c.
Insulation Class	A	
Motor Protection	Electronically Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Casing Material	Plastic UL94-V0	
Airflow Direction	Air intake over brackets	
Electrical Connection	Wires	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



D12B05SWBZ00

DC axial fans

> CONTACT US

Technical data			
Life Expectancy	70000	h at 40 °C	
	70000	h at 104 °F	
Fan Noise	48	dB(A)	
Cable Length	300	mm	
	11.81	in	
Fixing System	Screws		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP52		
Operating Temperature	-10÷70	°C	
	14÷158	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	
UL DATA			
UL File Number Recognized Component	E223195		


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



D12B05SWBZ00

DC axial fans

> CONTACT US

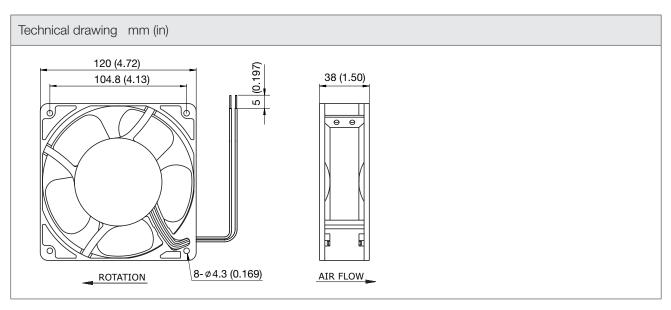

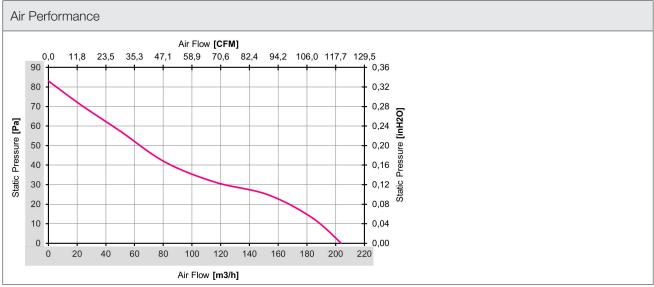


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

