

CCU03A231WNIUU

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; cULus; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	325/355	W
	1109/1211	BTU/h
Cooling Capacity L35L50	265/275	W
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	1.5	A
Rated Power L35L35	185/215	W
Rated Power L35L50	215/265	W
Frequency	50/60	Hz
Fuse T	15	A
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	140	g
GWP	631	
CO2e	0.09	t
Maximum Allowable Pressure	HP 377 Psig (26.0 bar) / LP 88 Psig (6.0 bar)	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU03A231WNIUU

indoor

> CONTATTACI

Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Enclosure Side	IP54	
Operating Temperature	20÷55	°C
	68÷131	°F
UL DATA		
UL File Number Listed	SA46405	
UL Environmental Type Rating	Type 12	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU03A231WNIUU

indoor

> CONTATTACI


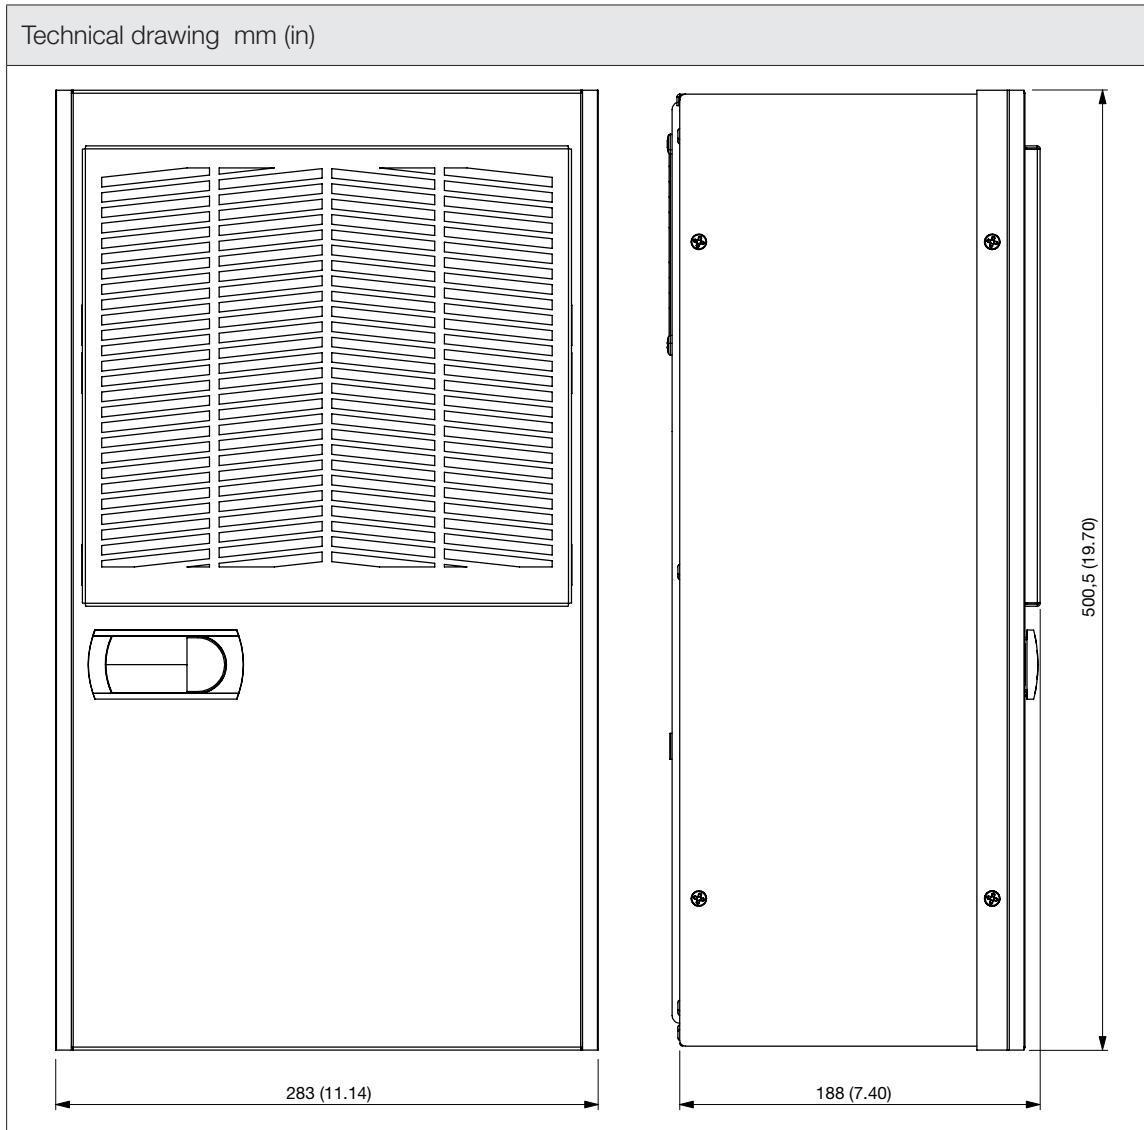


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

Cooling Capacity vs Temperature

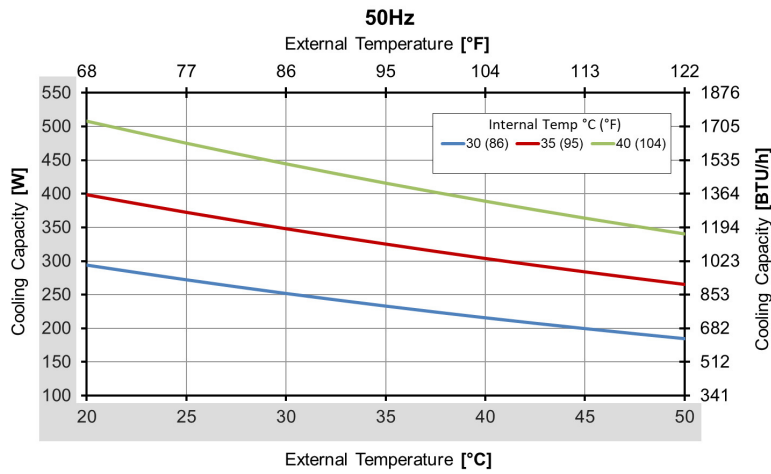

Cooling Capacity vs Temperature

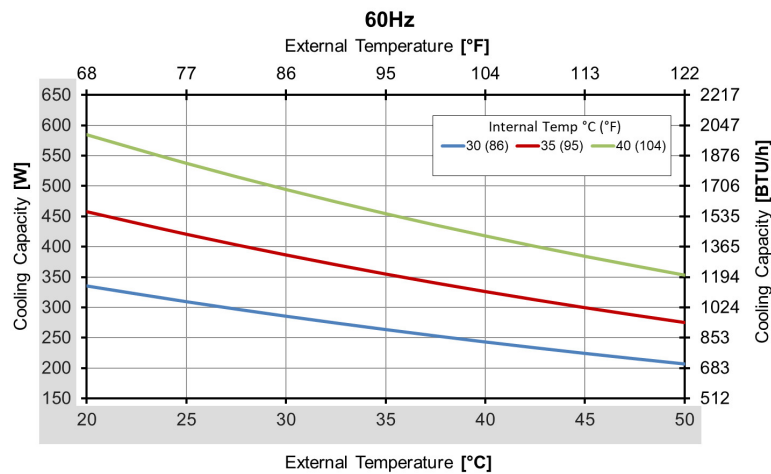


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.