

CCU05A231WN04X

outdoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	515/545 1757/1860	W BTU/h
Cooling Capacity L35L50	395/415 1348/1416	W BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	2/2.2	A
Rated Power L35L35	275/325	W
Rated Power L35L50	315/385	W
Frequency	50/60	Hz
Max Current	11	A
Fuse T	6	A
GENERIC DATA		
Weight	26.00	Kg
	57.32	lb
Casing Material	Stainless Steel	AISI 304
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	230	g

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU05A231WN04X

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

Technical data		
GWP	631	
CO2e	0.15	t
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Enclosure Side	IP55	
Operating Temperature	-20÷55	°C
	-4÷131	°F


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU05A231WN04X

outdoor

> CONTATTACI

Technical drawing mm (in)

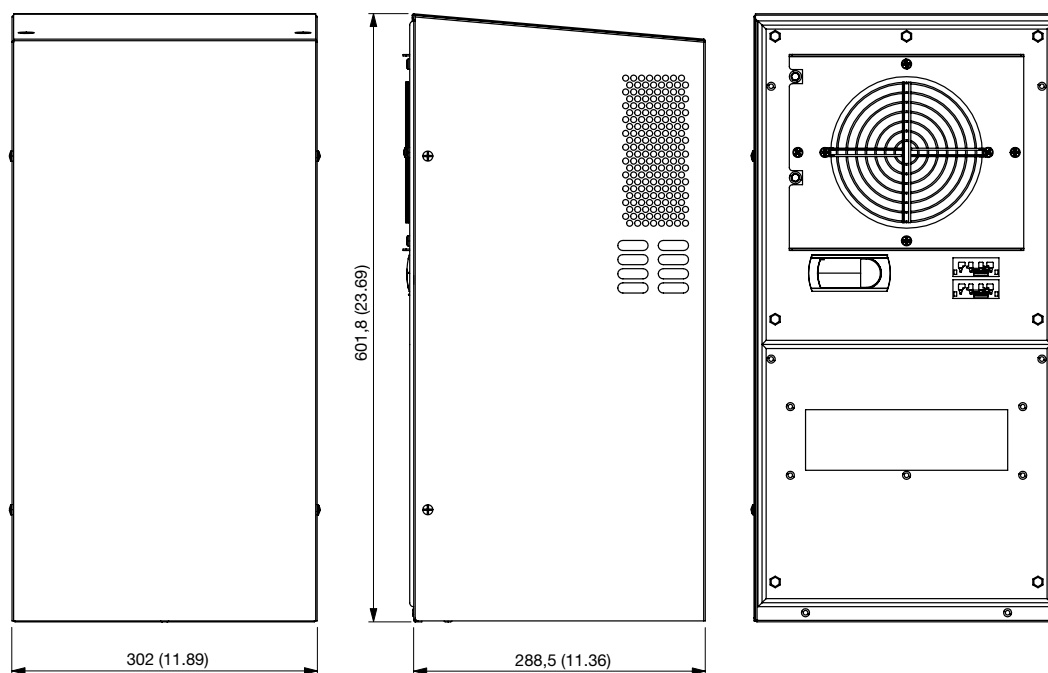

Cooling Capacity vs Temperature

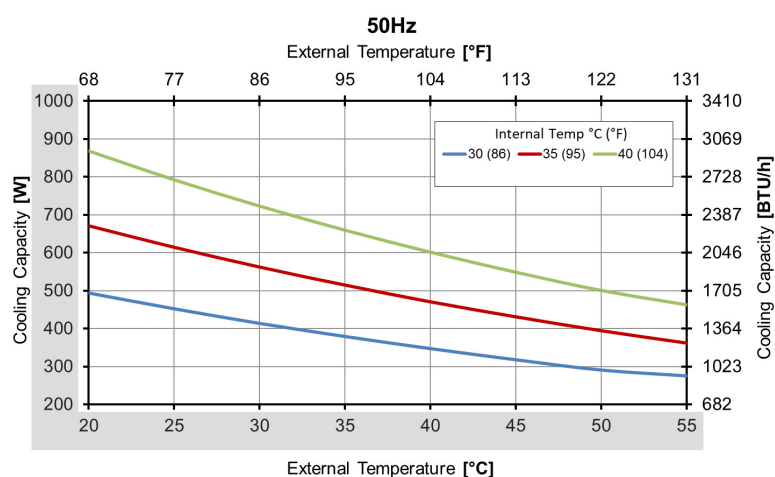


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU05A231WN04X

outdoor

> CONTATTACI

Cooling Capacity vs Temperature

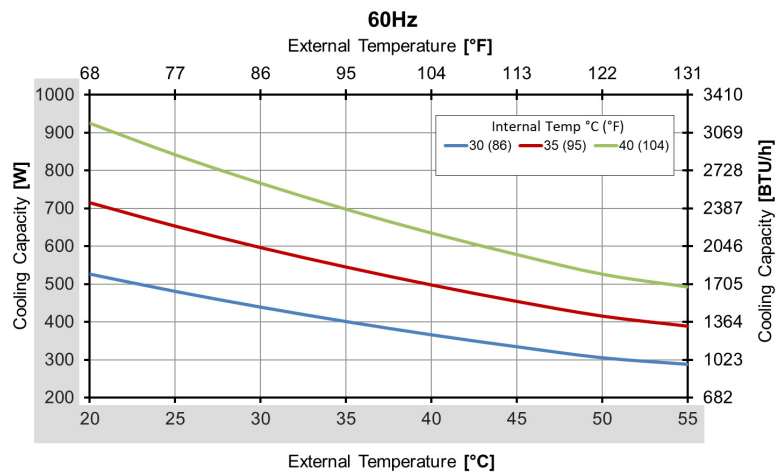


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.