

CCU08A231WN06X

outdoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	855/935	W
	2917/3190	BTU/h
Cooling Capacity L35L50	685/715	W
	2337/2440	BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	2.9/3.2	A
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	17	A
Fuse T	6	A
GENERIC DATA		
Casing Material	Stainless Steel	AISI 316
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	230	g
GWP	631	
CO2e	0.15	t

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU08A231WN06X

outdoor

> CONTATTACI

Technical data		
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Enclosure Side	IP55	
Operating Temperature	-20÷55	°C
	-4÷131	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU08A231WN06X

outdoor

> CONTATTACI

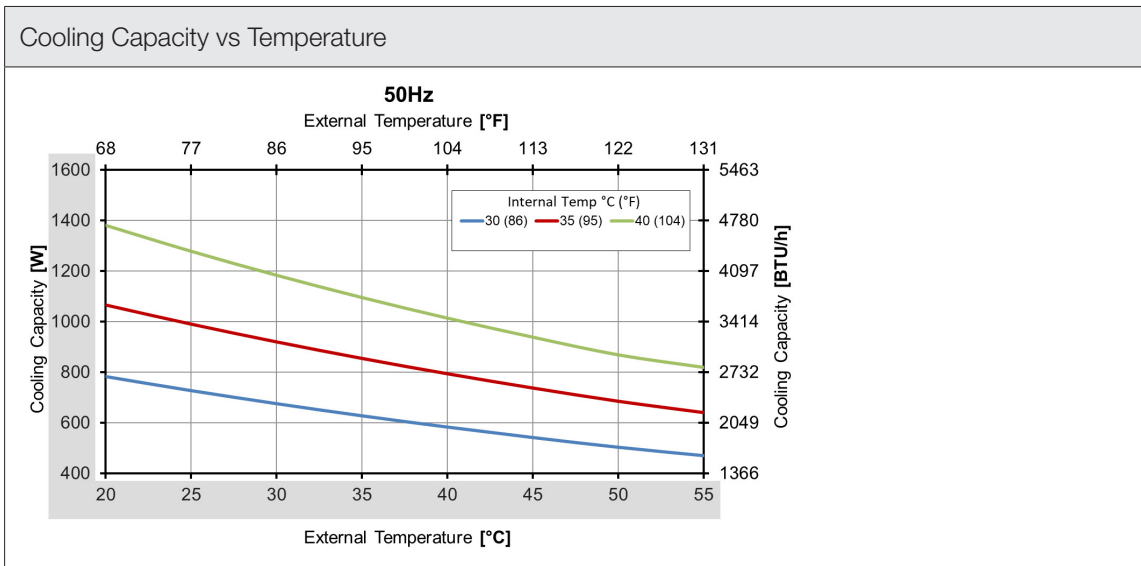
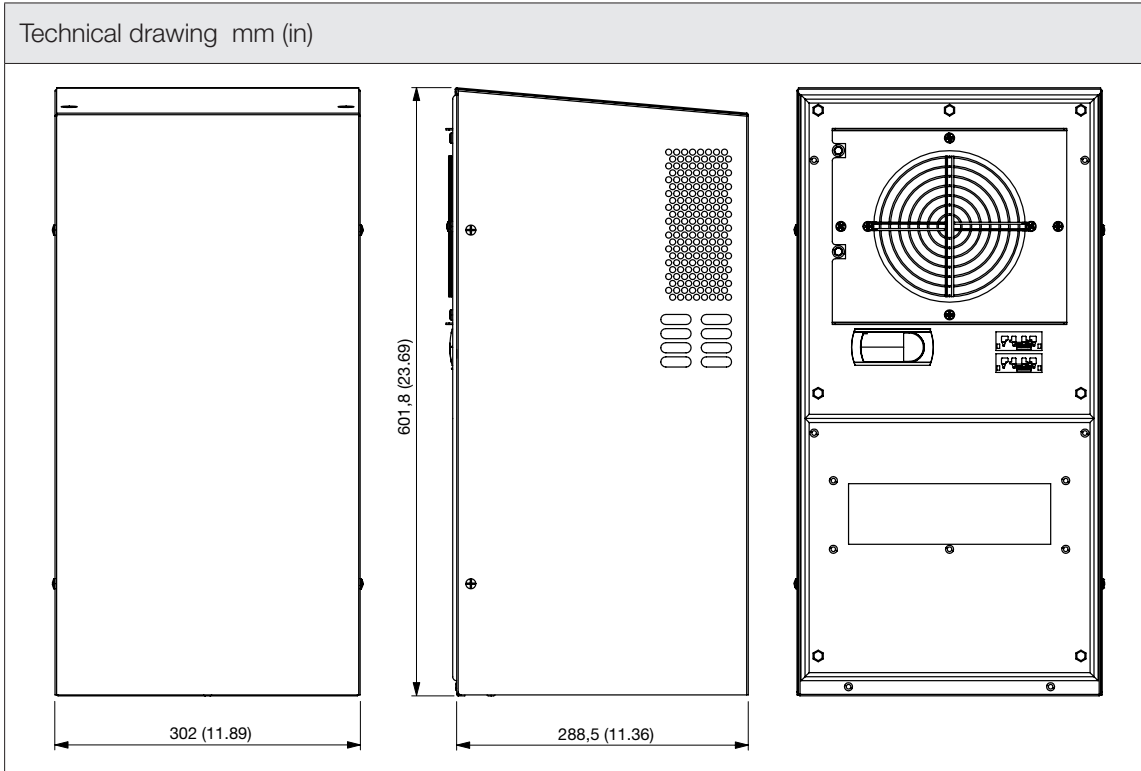


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU08A231WN06X

outdoor

> CONTATTACI

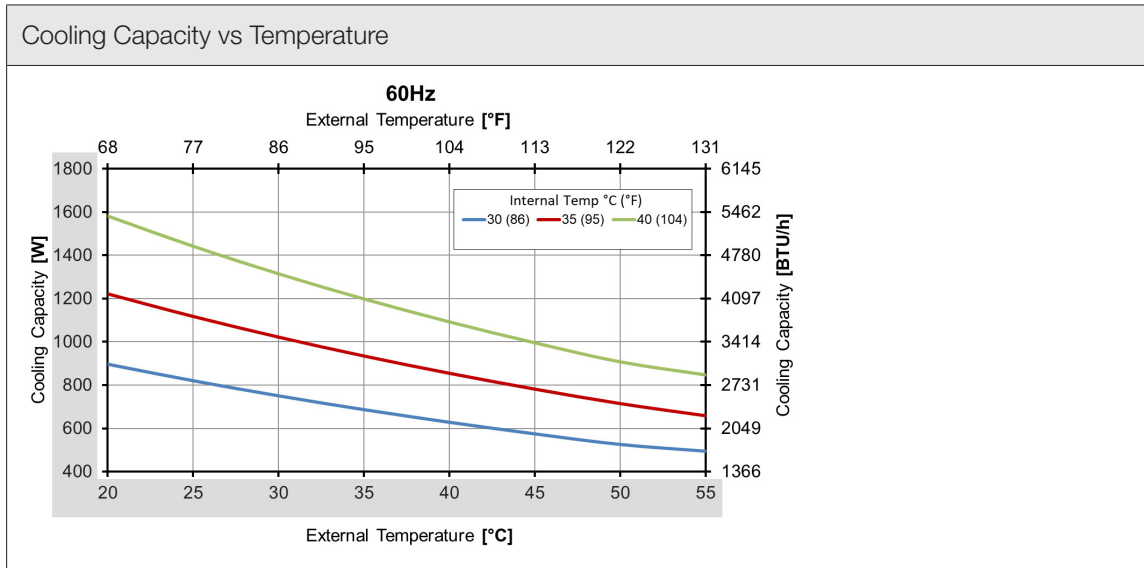


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.