CCU08A402WNOUX

outdoor

> CONTATTACI

bordos

The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	855/935	W
	2917/3190	BTU/h
Cooling Capacity L35L50	685/715	W
	2337/2440	BTU/h
ELECTRICAL DATA	_	
Rated Voltage	380/400/440/460/480	V a.c. 2 ~ at 50/60 Hz
Rated Current	1.8/2	A at 380 V a.c. 2 ~
Rated Current	1.7/1.9	A at 400 V a.c. 2 ~
Rated Current	1.6/1.8	A at 440 V a.c. 2 ~
Rated Current	1.5/1.7	A at 460 V a.c. 2 ~
Rated Current	1.5/1.6	A at 480 V a.c. 2 ~
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	9	А
Fuse T	6	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla



CCU08A402WNOUX

outdoor

> CONTATTACI

Technical data		
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	250	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DAT	A	
Protection Degree Internal Circuit	IP55	
Operating Temperature	-20÷55	°C
	-4÷131	°F



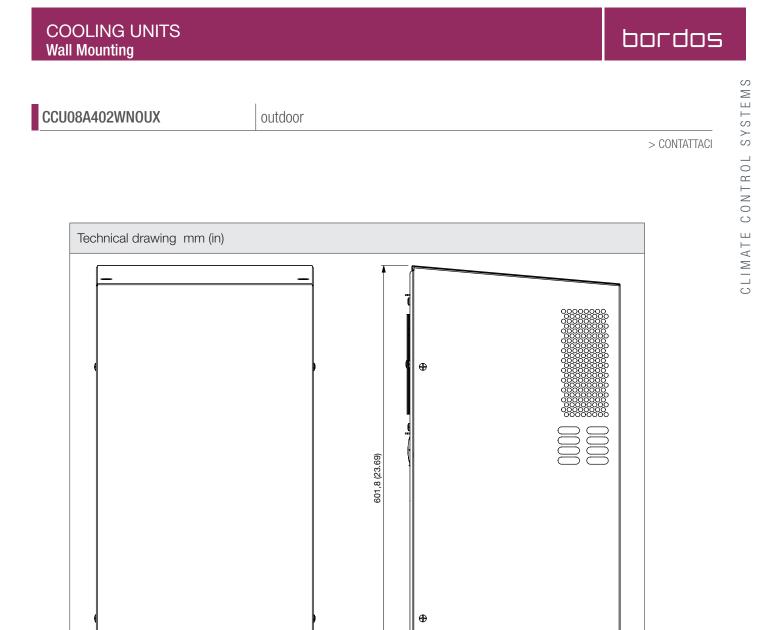


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

288,5 (11.36)



302 (11.89)

bordos

CCU08A402WNOUX

outdoor

> CONTATTACI

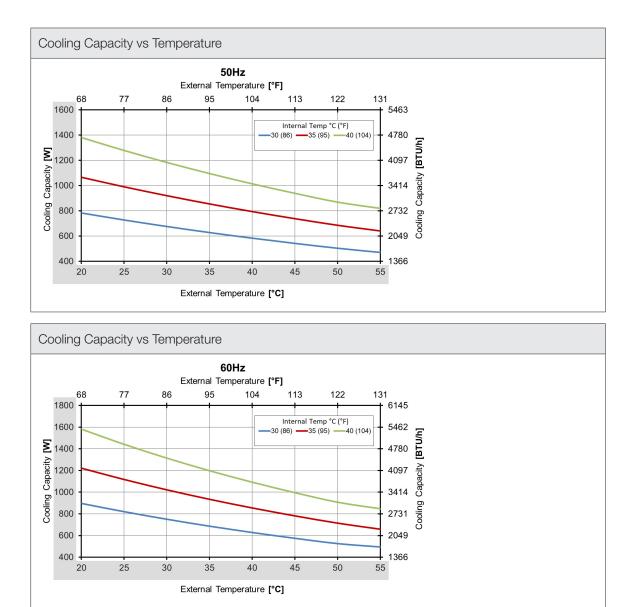


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

