

CCU15A402WN0UX

outdoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	1415/1555	W
	4828/5306	BTU/h
Cooling Capacity L35L50	1135/1185	W
	3873/4043	BTU/h
ELECTRICAL DATA		
Rated Voltage	380/400/440/460/480	V a.c. 2 ~ at 50/60 Hz
Factory Set Voltage	400	V a.c.
Rated Current	3.2/3.5	A at 380 V a.c. 2 ~
Rated Current	3/3.3	A at 400 V a.c. 2 ~
Rated Current	2.8/3	A at 440 V a.c. 2 ~
Rated Current	2.7/2.9	A at 460 V a.c. 2 ~
Rated Current	2.5/2.8	A at 480 V a.c. 2 ~
Rated Power L35L35	655/755	W
Rated Power L35L50	755/915	W
Frequency	50/60	Hz
Max Current	16	A
Fuse T	10	A

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU15A402WNOUX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

Technical data		
GENERIC DATA		
Weight	48.00 105.82	Kg lb
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	370	g
GWP	631	
CO2e	0.33	t
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Enclosure Side	IP55	
Operating Temperature	-20÷55 -4÷131	°C °F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU15A402WN0UX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

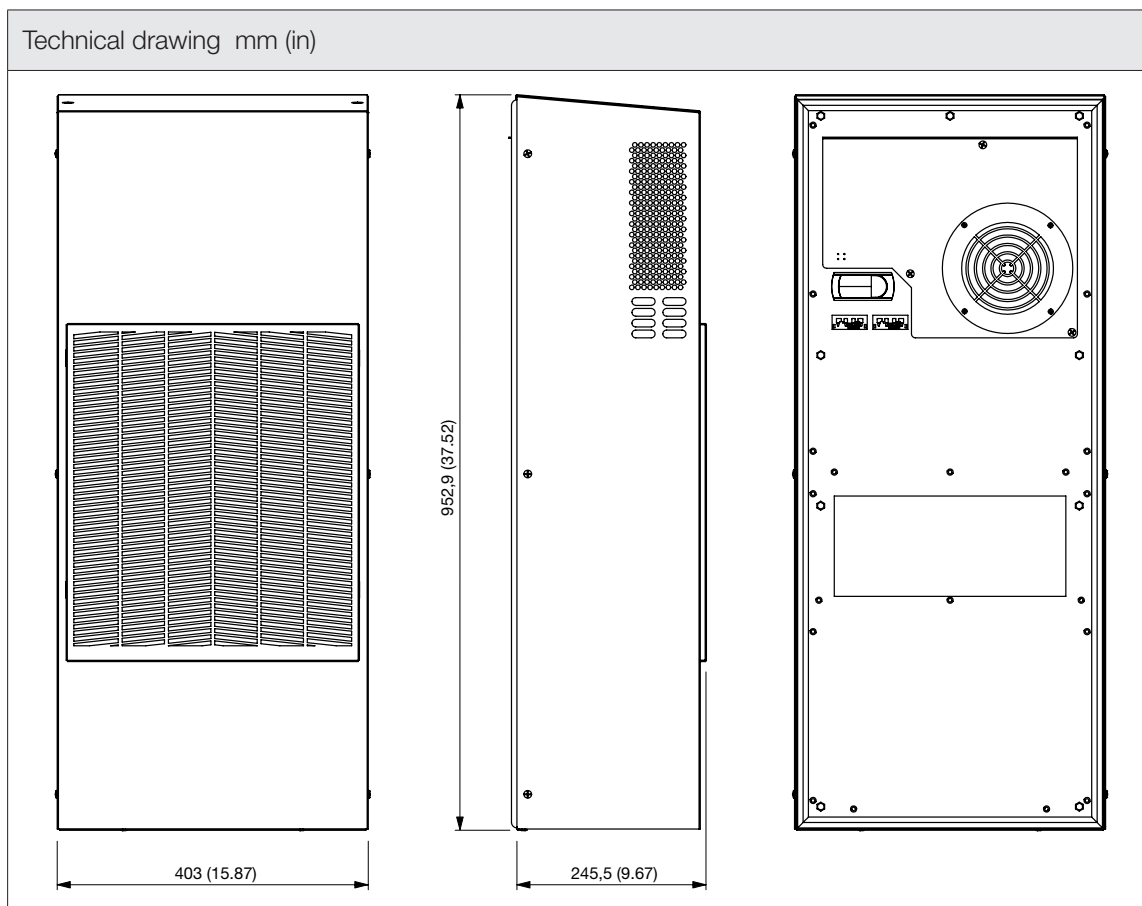



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU15A402WN0UX

outdoor

> CONTATTACI

Cooling Capacity vs Temperature

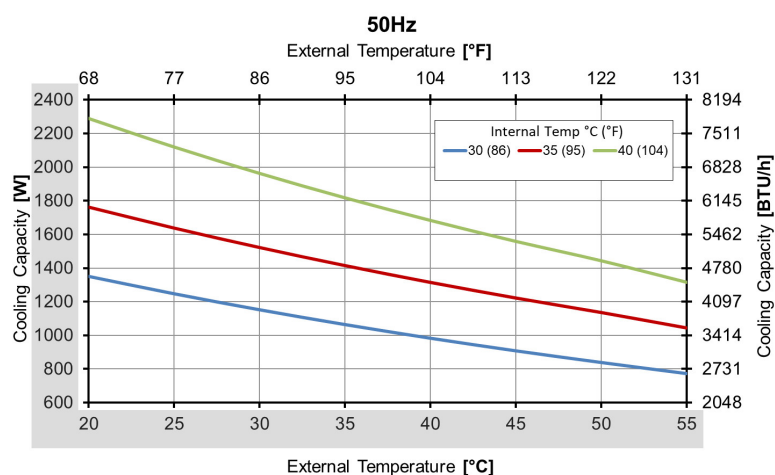

Cooling Capacity vs Temperature

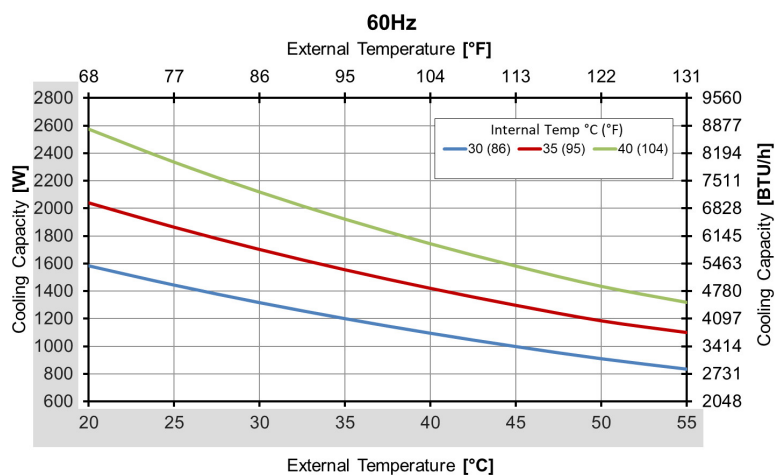


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.