CCU20A231WNIUU

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; cULus; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	1955/2145	W
	6671/7319	BTU/h
Cooling Capacity L35L50	1565/1635	W
	5340/5579	BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	6.6/6.6	А
Rated Power L35L35	925/1065	W
Rated Power L35L50	1075/1295	W
Frequency	50/60	Hz
Max Current	6.1-31	А
Fuse T	15	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	360	g
GWP	631	



COOLING UNITS Wall Mounting



CCU20A231WNIUU

indoor

> CONTATTACI


Technical data			
CO2e	0.23	t	
Maximum Allowable Pressure	HP 377 Psig (26.0 bar) / LP 88 Psig (6.0 bar)		
ENVIRONMENTAL AND THERMAL DATA			
Protection Degree Internal Circuit	IP54		
Operating Temperature	20÷55	°C	
	68÷131	°F	
UL DATA			
UL File Number Listed	SA46405		
UL Environmental Type Rating	Type 12, pending		



CCU20A231WNIUU

indoor

> CONTATTACI

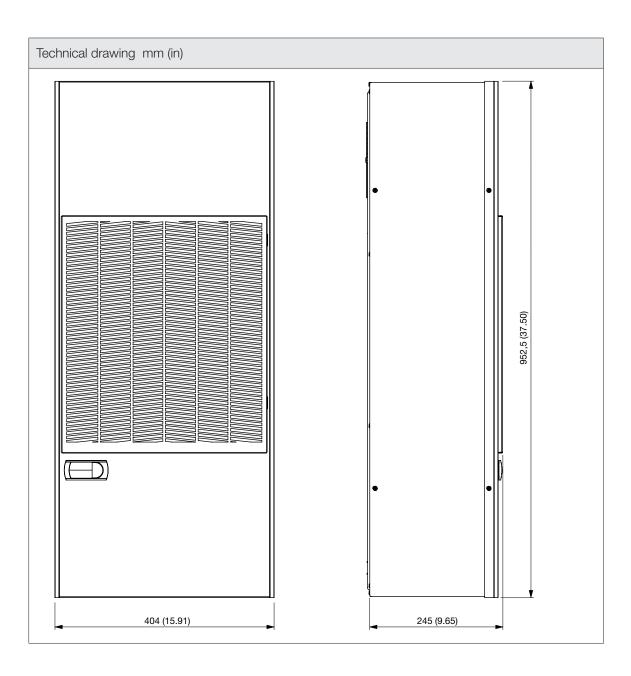



CCU20A231WNIUU

indoor

> CONTATTACI

