

CCU20A402WNIUU

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data

APPROVALS

| | | |
|-----------|-----------------|--|
| Approvals | CE; cULus; UKCA | |
|-----------|-----------------|--|

PERFORMANCE

| | | |
|-------------------------|------------------------|------------|
| Cooling Capacity L35L35 | 1955/2145 6671/7319 | W BTU/h |
|-------------------------|------------------------|------------|

| | | |
|-------------------------|------------------------|------------|
| Cooling Capacity L35L50 | 1565/1635 5340/5579 | W BTU/h |
|-------------------------|------------------------|------------|

ELECTRICAL DATA

| | | |
|--------------------|-------------|------------------------|
| Rated Voltage | 400/460/480 | V a.c. 2 ~ at 50/60 Hz |
| Rated Current | 3.8/3.8 | A |
| Rated Power L35L35 | 925/1065 | W |
| Rated Power L35L50 | 1075/1295 | W |
| Frequency | 50/60 | Hz |
| Max Current | 6.1-31 | A |
| Fuse T | 15 | A |

GENERIC DATA

| | | |
|-----------------------|---------------|---|
| Casing Material | Painted Steel | |
| RAL Number | 7035 | |
| Electrical Connection | Connector | |
| Refrigerant Number | R513A | |
| Refrigerant Charge | 360 | g |
| GWP | 631 | |

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU20A402WNIUU

indoor

> CONTATTACI

| Technical data | | |
|------------------------------------|---|----------|
| CO2e | 0.23 | t |
| Maximum Allowable Pressure | HP 377 Psig (26.0 bar) / LP 88 Psig (6.0 bar) | |
| ENVIRONMENTAL AND THERMAL DATA | | |
| Protection Degree Internal Circuit | IP54 | |
| Operating Temperature | 20÷55 68÷131 | °C °F |
| UL DATA | | |
| UL File Number Listed | SA46405 | |
| UL Environmental Type Rating | Type 12 | |

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU20A402WNIUU

indoor

> CONTATTACI

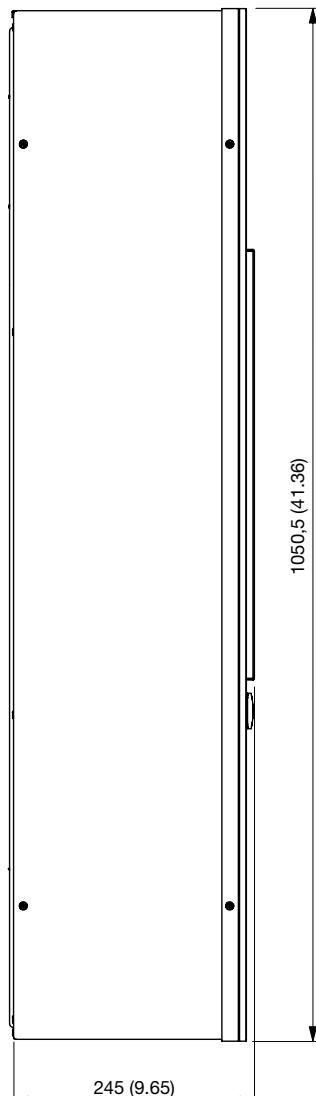
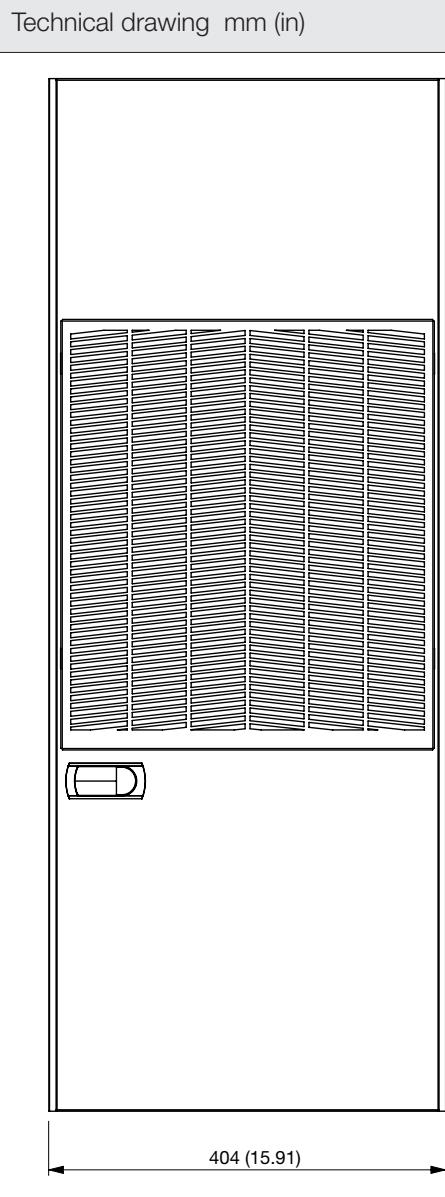



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU20A402WNIUU

indoor

> CONTATTACI

Cooling Capacity vs Temperature

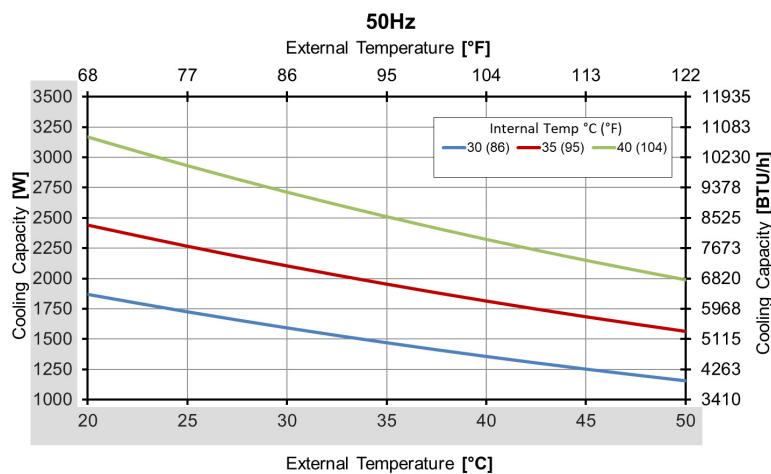

Cooling Capacity vs Temperature

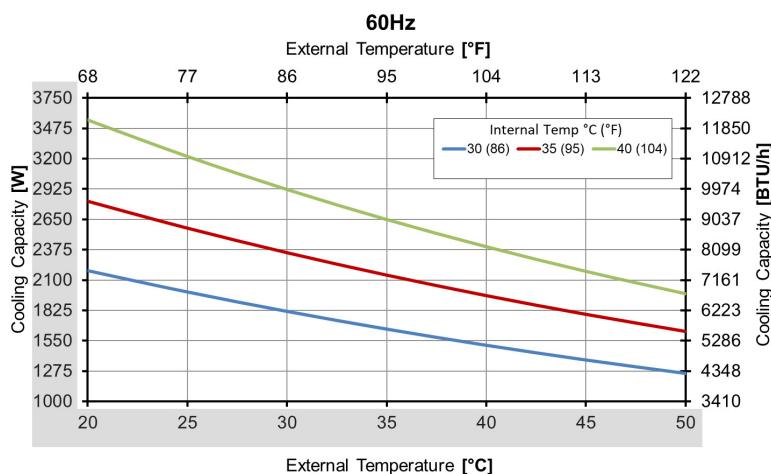


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.