FF12Z

standard without fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

echnical data				
APPROVALS				
Approvals	CE; cURus; cULus; cCSAus; UKCA			
MECHANICAL DATA				
Marine Mall This line and	1.3-3.2	mm		
Mounting Wall Thickness	0.05-0.13	in		
GENERIC DATA				
Spare Parts Filter Media	M12FPF-EU3			
Casing Material	PC/ABS UL94 5VB			
ANSI Code	ANSI 61 Gray			
Filter Class	G3	EN 779		
Filter Class	ISO coarse 55%	ISO 16890		
Filter Material	thermo-linked progressive structure synthetic fibre			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP54			
Operating Temperature	-30÷60	°C		
	-22÷140	°F		
Storage Temperature	-40÷70	°C		
	-40÷158	°F		
UL DATA				
UL File Number Recognized Component	E237844			
UL File Number Listed	E500932			
UL Environmental Type Rating	Type 12			

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.




FF12Z

standard without fan


> CONTACT US

	Technical data			
	UL Surrounding Temperature	60	°C	
		140	°F	





> CONTACT US

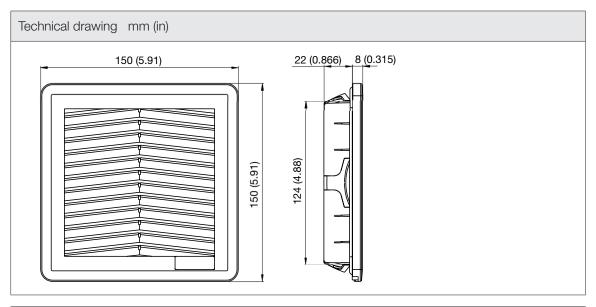

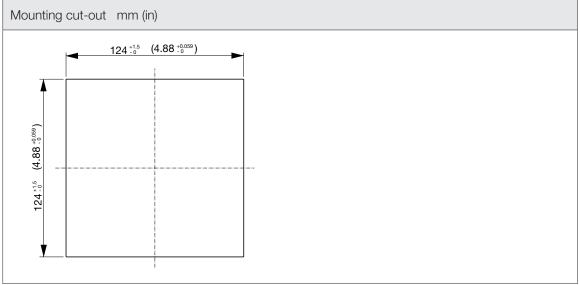


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



FF12Z

standard without fan

> CONTACT US

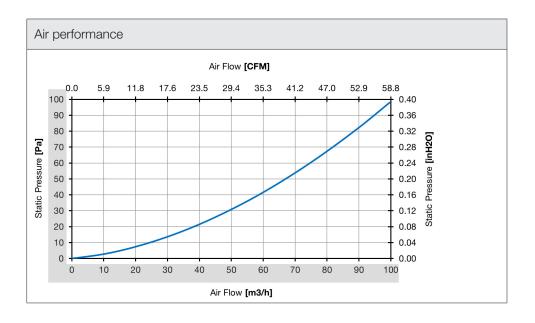


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

