FF15N

standard without fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data				
APPROVALS				
Approvals	CE; cURus; cULus; cCSAus; UKCA			
MECHANICAL DATA				
Mounting Wall Thickness	1.3-3.7	mm		
	0.05-0.15	in		
GENERIC DATA				
Spare Parts Filter Media	M15FPF-EU3			
Casing Material	PC/ABS UL94 V-0			
RAL Number	9005			
Filter Class	G3	EN 779		
Filter Class	ISO coarse 55%	ISO 16890		
Filter Material	thermo-linked progressive structure synthetic fibre			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP54			
Operating Temperature	-30÷60	°C		
	-22÷140	°F		
Storage Temperature	-40÷70	°C		
	-40÷158	°F		
UL DATA				
UL File Number Recognized Component	E237844			
UL File Number Listed	E500932			
UL Environmental Type Rating	Type 12			



FF15N standard without fan

> CONTACT US


Te	echnical data		
	III Common dia a Taman anatoma	60	°C
UL Surrounding Temperature	140	°F	




FF15N

standard without fan

> CONTACT US

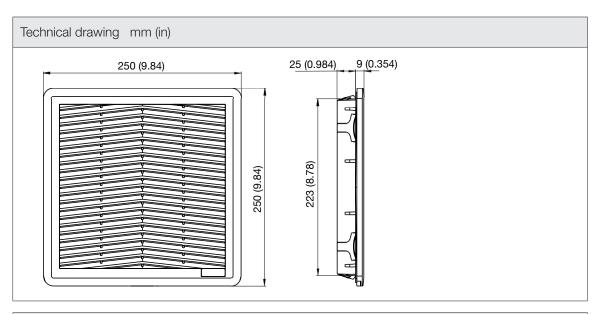

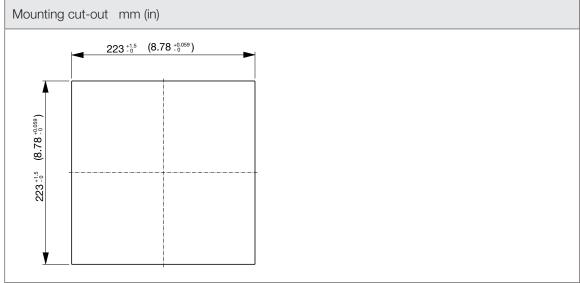



FF15N

standard without fan

> CONTACT US

