standard with fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Max Airflow	535/630	m³/h	
	315/371	CFM	
Airflow with Exhaust Filter	357/410	m³/h	
	210/241	CFM	
Max Static Pressure	185/235	Pa	
	0.74/0.94	in H2O	
ELECTRICAL DATA			
Rated Voltage	400	V a.c. 3 ~	
Rated Current	0.26/0.23	А	
Rated Power	99/124	W	
Operating Voltage	360-440	V a.c. 3 ~	
Frequency	50/60	Hz	
Appliance Class	I		
MECHANICAL DATA			
Mounting Wall Thickness	1.3-3.7	mm	
	0.05-0.15	in	
Bearing	Ball Bearing		
GENERIC DATA			
Spare Parts Filter Media	M20FPF-EU3		



FF20A400TUE

standard with fan

> CONTACT US


Technical data			
Casing Material	PC/ABS UL94 V-0		
RAL Number	7035		
Life Expectancy	70000	h at 25 °C	
	70000	h at 77 °F	
Airflow Direction	Direct		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	64.1/67.8	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-20÷60	°C	
	-4÷140	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	




FF20A400TUE

standard with fan

> CONTACT US

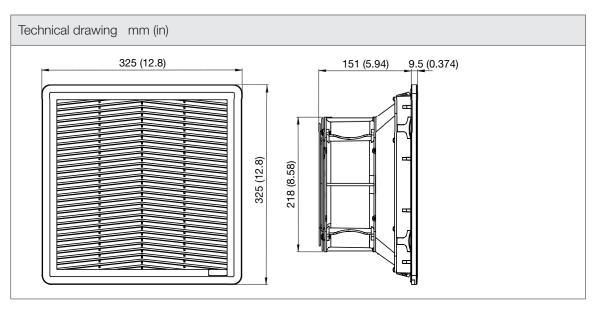

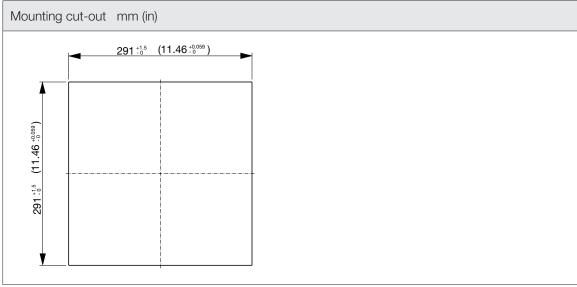



FF20A400TUE

standard with fan

> CONTACT US

