standard with fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	680/740	m³/h
	400/436	CFM
Airflow with Exhaust Filter	415/430	m³/h
	244/253	CFM
Max Static Pressure	185/170	Pa
	0.74/0.68	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	1.01/1.37	А
Rated Power	110/156	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
Bearing	Ball Bearing	



FF20GA115ZE1

standard with fan

> CONTACT US


Technical data		
GENERIC DATA		
Spare Parts Filter Media	M20FPF-EU3RM	
Casing Material	PC/ABS UL94 5VB	
ANSI Code	ANSI 61 Gray	
Life Expectancy	53000/78000	h at 25 °C
	53000/78000	h at 77 °F
Airflow Direction	Direct	
Electrical Connection	Screwless Terminal Block	
Wires Section	0.75-2.5	mm²
Wires Section	20-14	AWG
Fan Noise	67/71	dB(A)
Filter Class	G3	EN 779
Filter Class	ISO coarse 55%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP55	
On another Towns and the	-10÷55	°C
Operating Temperature	14÷131	°F
Storage Temperature	-30÷70	°C
	-22÷158	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL File Number Listed	E500932	
UL Environmental Type Rating	Type 12	
UL Surrounding Temperature	55	°C
	131	°F




FF20GA115ZE1

standard with fan

> CONTACT US

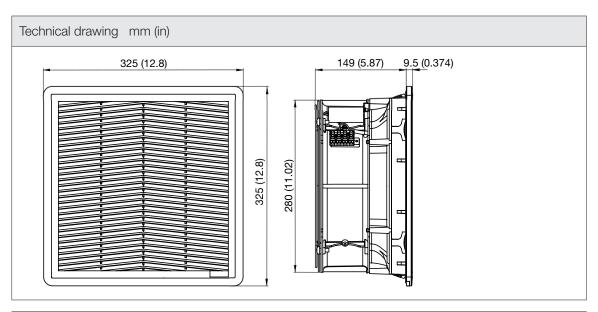

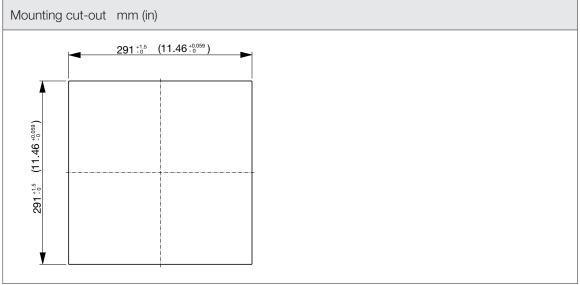



FF20GA115ZE1

standard with fan

> CONTACT US

