FF20GA230UE

standard with fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	705/795	m³/h
	415/468	CFM
Airflow with Exhaust Filter	510/560	m³/h
Almow with exhaust Filter	300/330	CFM
Max Static Pressure	200/205	Pa
	0.80/0.82	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.67/0.84	А
Rated Power	155/194	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
Bearing	Ball Bearing	



FF20GA230UE


standard with fan


> CONTACT US

Technical data		
GENERIC DATA		
Spare Parts Filter Media	M20FPF-EU3	
Casing Material	PC/ABS UL94 V-0	
RAL Number	7035	
Life Europtonou	57500/70000	h at 25 °C
Life Expectancy	57500/70000	h at 77 °F
Airflow Direction	Direct	
Electrical Connection	Screwless Terminal Block	
Wires Section	0.75-2.5	mm²
Wires Section	20-14	AWG
Fan Noise	72/75	dB(A)
Filter Class	G3	EN 779
Filter Class	ISO coarse 55%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
On exating Temporature	-25÷60	°C
Operating Temperature	-13÷140	°F
Ctore as Toron eveture	-30÷70	°C
Storage Temperature	-22÷158	°F



> CONTACT US

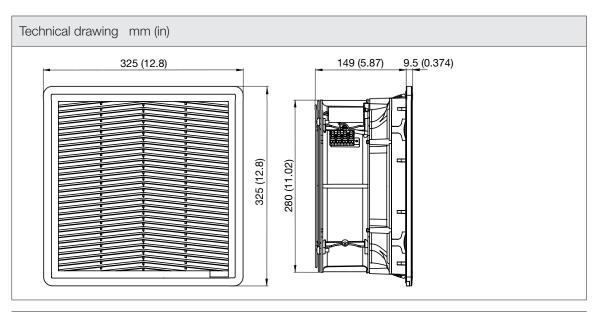

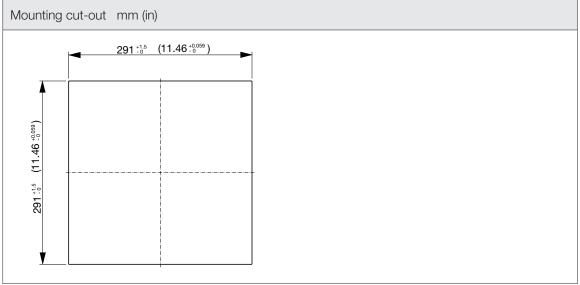



FF20GA230UE

standard with fan

> CONTACT US

