standard with fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Max Airflow	15	m³/h
	9	CFM
Max Static Pressure	24	Pa
	0.10	in H2O
ELECTRICAL DATA		
Rated Voltage	24	V d.c.
Rated Current	0.15	А
Rated Power	3.6	W
Operating Voltage	10-27.6	V d.c.
Motor Protection	Electronically Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
Bearing	Ball Bearing	
GENERIC DATA		
Spare Parts Filter Media	M08FPF	
RAL Number	7035	
Life Expectancy	70000	h at 25 °C
	70000	h at 77 °F



standard with fan


> CONTACT US


Technical data		
Airflow Direction	Direct	
Electrical Connection	Wires	
Wires Section	24	AWG
Fan Noise	32.5	dB(A)
Filter Class	G3	EN 779
Filter Class	ISO coarse 55%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
Cable Length	200	mm
	7.87	in
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
Operating Temperature	-10÷50	°C
	14÷122	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	50	°C
	122	°F



standard with fan

> CONTACT US

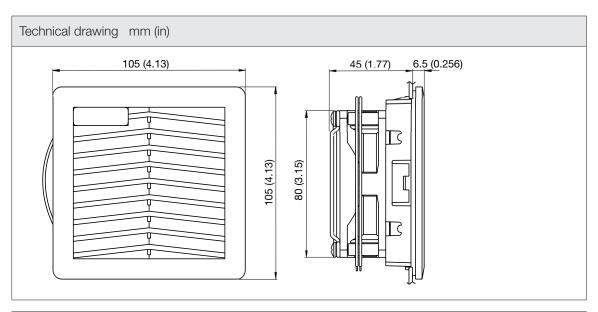

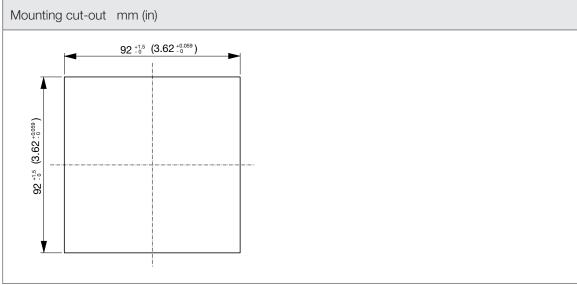



standard with fan

> CONTACT US

