FPF15KGU115BE-120

standard with fan

virdis



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Max Airflow	360/400	m³/h	
	212/235	CFM	
Max Static Pressure	160/180	Pa	
	0.64/0.72	in H2O	
ELECTRICAL DATA			
Rated Voltage	115	V a.c.	
Rated Current	0.68/0.79	A	
Rated Power	75/91	W	
Operating Voltage	103.5-126.5	V a.c.	
Frequency	50/60	Hz	
Appliance Class	I		
Motor Protection	Thermally Protected		
MECHANICAL DATA			
Mounting Wall Thickness	1.5-2.2	mm	
	0.06-0.09	in	
Bearing	Ball Bearing		
GENERIC DATA			
RAL Number	7035		



virdis

FPF15KGU115BE-120


Technical data			
Life Expectancy	50000/59000	h at 40 °C	
	50000/59000	h at 104 °F	
Airflow Direction	Direct		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm ²	
Wires Section	20-14	AWG	
Fan Noise	66/69	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-10÷55	°C	
	14÷131	°F	
Storage Temperature	-30÷70	°C	
	-22÷158	°F	



virdis

FPF15KGU115BE-120

standard with fan

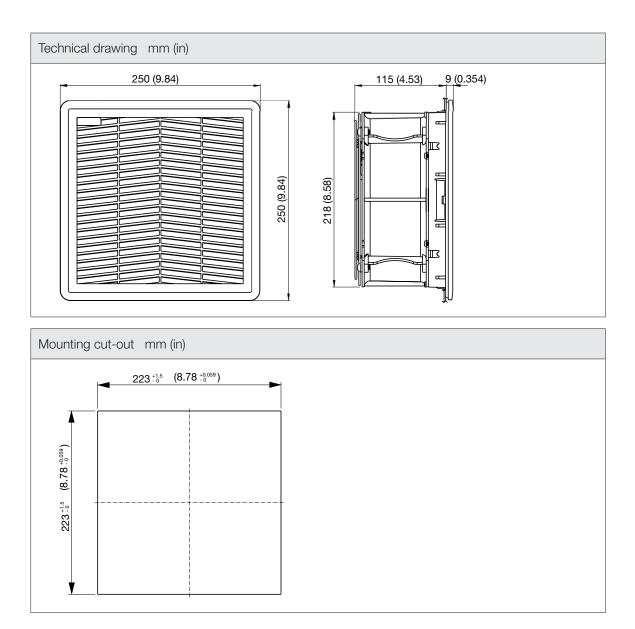



virdis

FPF15KGU115BE-120

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

