standard with fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data				
APPROVALS				
Approvals	CE; UKCA			
PERFORMANCE				
Max Airflow	145	m³/h		
	85	CFM		
Max Static Pressure	76	Pa		
	0.31	in H2O		
ELECTRICAL DATA				
Rated Voltage	48	V d.c.		
Rated Current	0.16	А		
Rated Power	7.7	W		
Operating Voltage	25-55.2	V d.c.		
Motor Protection	Electronically Protected			
MECHANICAL DATA				
Mounting Wall Thickness	1.5-2.2	mm		
	0.06-0.09	in		
Bearing	Ball Bearing			
GENERIC DATA				
RAL Number	7032			
Life Expectancy	50000	h at 25 °C		
	50000	h at 77 °F		
Airflow Direction	Reverse			



standard with fan


> CONTACT US


Technical data			
Electrical Connection	Terminal Block		
Wires Section	1-2.5	mm²	
Wires Section	18-12	AWG	
Fan Noise	42.5	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-10÷55	°C	
	14÷131	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	



standard with fan

> CONTACT US

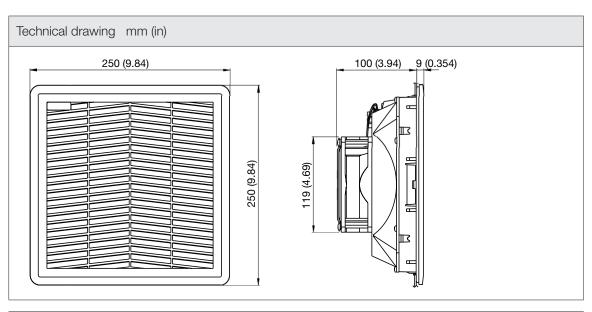

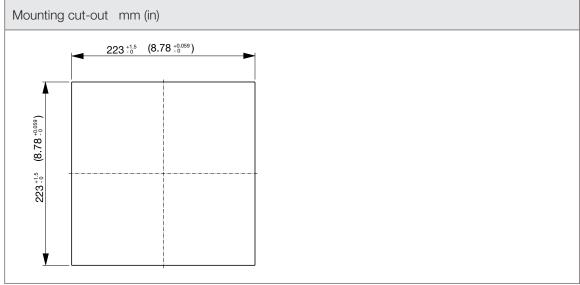



standard with fan

> CONTACT US

