FPF15KPU230BE-110

standard with fan

virdis



-	
 -	
 -	
-	
 -	
 -	
 -	
 -	
 -	
 -	
 -	
 -	

FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Max Airflow	115/125	m³/h
	68/74	CFM
Max Static Pressure	51/59	Pa
	0.20/0.24	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.125/0.11	A
Rated Power	20/19	W
Operating Voltage	216-244	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Impedance Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
Bearing	Ball Bearing	
GENERIC DATA		
RAL Number	7035	



virdis

FPF15KPU230BE-110


Technical data				
Life Expectancy	40000	h at 40 °C		
	40000	h at 104 °F		
Airflow Direction	Direct			
Electrical Connection	Terminal Block			
Wires Section	1-2.5	mm ²		
Wires Section	18-12	AWG		
Fan Noise	46/50	dB(A)		
Filter Class	G3	EN 779		
Filter Class	ISO coarse 55%	ISO 16890		
Filter Material	thermo-linked progressive structure synthetic fibre			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP54			
Operating Temperature	-10÷50	°C		
	14÷122	°F		
Storage Temperature	-40÷70	°C		
	-40÷158	°F		
UL DATA				
UL File Number Recognized Component	E237844			
UL Environmental Type Rating	Type 12			
UL Ambient Temperature	50	°C		
	122	°F		



virdis

FPF15KPU230BE-110

standard with fan

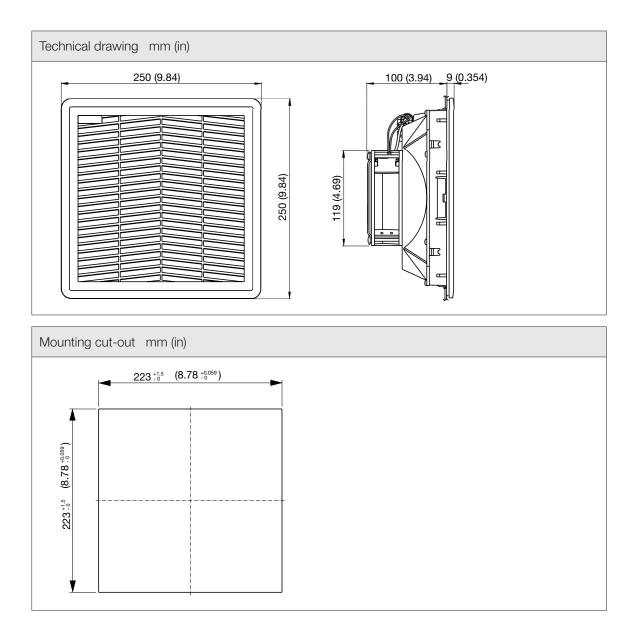



virdis

FPF15KPU230BE-110

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

