standard with fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Max Airflow	240/270	m³/h
	141/159	CFM
Max Static Pressure	111/134	Pa
	0.45/0.54	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.132/0.13	А
Rated Power	29/29	W
Operating Voltage	207-253	Va.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
Bearing	Ball Bearing	
GENERIC DATA		
RAL Number	7035	



FPF15KU230BER-110

standard with fan

> CONTACT US


Technical data			
Life Expectancy	40000	h at 40 °C	
	40000	h at 104 °F	
Airflow Direction	Reverse		
Electrical Connection	Terminal Block		
Wires Section	1-2.5	mm²	
Wires Section	18-12	AWG	
Fan Noise	50/55	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-10÷50	°C	
	14÷122	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	
UL DATA			
UL File Number Recognized Component	E237844		
UL Environmental Type Rating	Type 12		
UL Ambient Temperature	50	°C	
	122	°F	




FPF15KU230BER-110

standard with fan

> CONTACT US

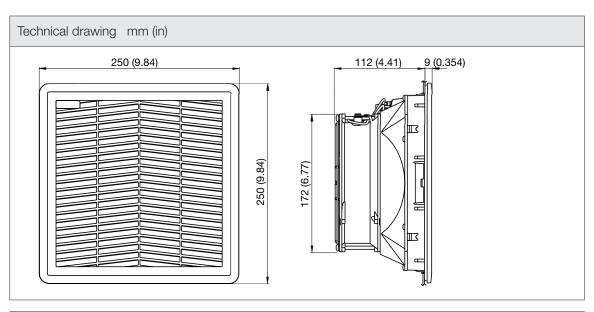

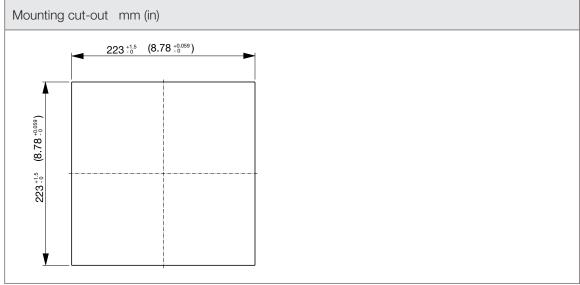



FPF15KU230BER-110

standard with fan

> CONTACT US

