standard with fan

> CONTACT US



GF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Characterized by a mounting system with jacks for thick wall application (up to 8mm extensible up to 16mm by cutting the jacks) in both plate and plastic enclosures, and a hinged opening for a filter media replacement in seconds.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	710/800	m³/h
	418/471	CFM
Airflow with Exhaust Filter	510/560	m³/h
	300/330	CFM
Max Static Pressure	202/201	Pa
	0.81/0.81	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.71/0.89	А
Rated Power	162/205	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1-8	mm
	0.04-0.31	in
GENERIC DATA		
RAL Number	7035	



GF20KGU230BE

standard with fan

> CONTACT US


Technical data			
Life Expectancy	57500/70000	h at 25 °C	
	57500/70000	h at 77 °F	
Airflow Direction	Direct		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-10÷50	°C	
	14÷122	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	




GF20KGU230BE

standard with fan

> CONTACT US

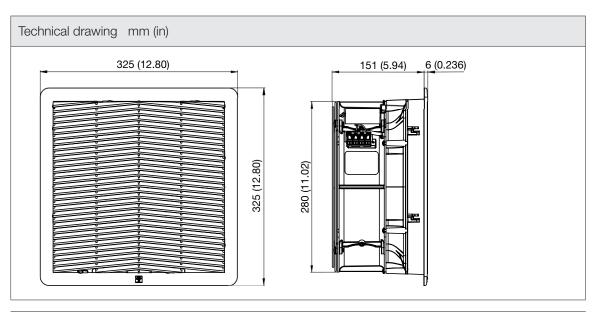

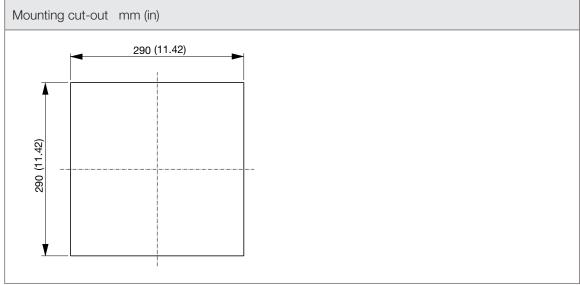



GF20KGU230BE

standard with fan

> CONTACT US



