heaters with cable metal cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with cable connection are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Heating Power	80	W	
ELECTRICAL DATA			
Rated Voltage	110-240	V a.c./d.c.	
Operating Voltage	99-264	V a.c.	
Frequency	50/60	Hz	
Max Current	3.3	А	
Appliance Class	I		
GENERIC DATA			
Casing Material	Black Anodised Aluminium		
Electrical Connection	Wires		
Wires Section	0.5	mm²	
Cable Length	500	mm	
	19.68	in	
Fixing System	DIN rail		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP20		
Operating Temperature	-30÷50	°C	
	-22÷122	°F	



ANTI-CONDENSATION HEATERS

"H" series

HWMS080X

heaters with cable metal cover

> CONTACT US

Technical data		
Storage Temperature	-40÷70	°C
	-40÷158	°F


CLIMATE C




HWMS080X

heaters with cable metal cover

> CONTACT US

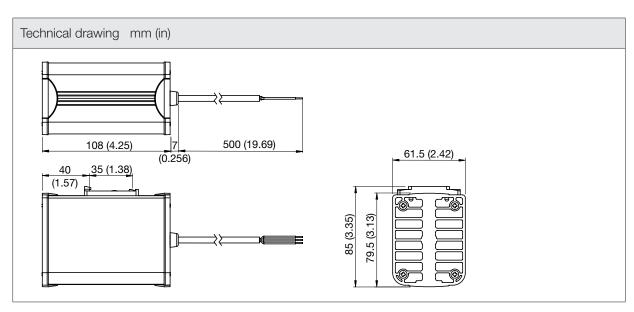

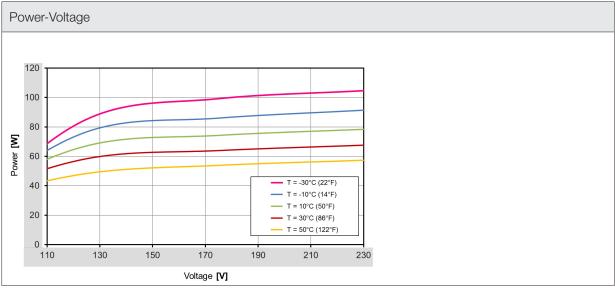



heaters with cable metal cover

> CONTACT US

