heaters with cable metal cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with cable connection are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

Technical data				
APPROVALS				
Approvals	CE; UKCA			
PERFORMANCE				
Heating Power	150	W		
ELECTRICAL DATA				
Rated Voltage	110-240	V a.c./d.c.		
Operating Voltage	99-264	V a.c.		
Frequency	50/60	Hz		
Max Current	5.4	А		
Appliance Class	I			
GENERIC DATA				
Casing Material	Black Anodised Aluminium			
Electrical Connection	Wires			
Wires Section	0.5	mm²		
Cable Length	500	mm		
Cable Length	19.68	in		
Fixing System	DIN rail			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP20			
)porating Tomporature	-30÷50	°C		
Operating Temperature	-22÷122	°F		



## ANTI-CONDENSATION HEATERS

"H" series

HWMS150X

heaters with cable metal cover

> CONTACT US


	Technical data		
Storage Temperature	Character Tarres are true	-40÷70	°C
	-40÷158	°F	


CLIMATE COI



heaters with cable metal cover

> CONTACT US

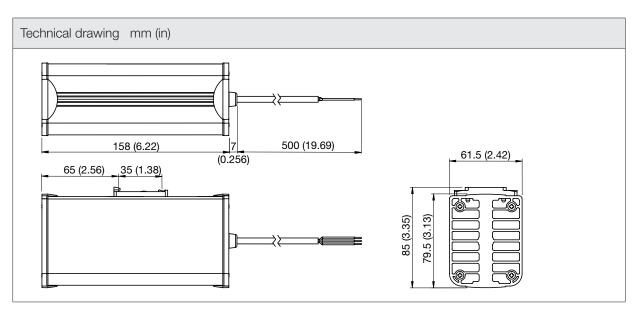

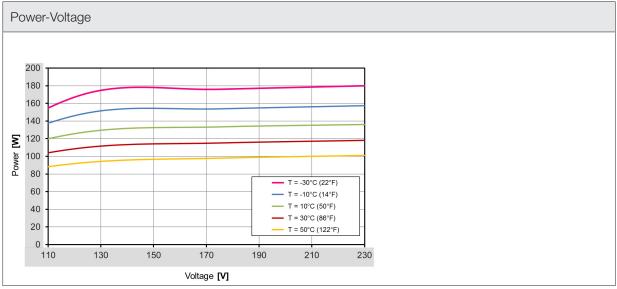



HWMS150X

heaters with cable metal cover

> CONTACT US

