heaters with cable plastic cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with cable connection are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

| Technical data | | | | |
|--------------------------------|--------------------|-------------|--|--|
| APPROVALS | | | | |
| Approvals | CE; cURus; UKCA | | | |
| PERFORMANCE | | | | |
| Heating Power | 45 | W | | |
| ELECTRICAL DATA | | | | |
| Rated Voltage | 110-240 | V a.c./d.c. | | |
| Operating Voltage | 99-264 | V a.c. | | |
| Frequency | 50/60 | Hz | | |
| Max Current | 1.2 | A | | |
| Appliance Class | 1 | | | |
| GENERIC DATA | | | | |
| Casing Material | Black PET UL94 V-0 | | | |
| Electrical Connection | Wires | | | |
| Wires Section | 20 | AWG | | |
| Cable Length | 500 | mm | | |
| | 19.68 | in | | |
| Fixing System | DIN rail | | | |
| ENVIRONMENTAL AND THERMAL DATA | | | | |
| IP Protection Degree | IP20 | | | |
| Operating Temperature | -30÷50 | °C | | |
| | -22÷122 | °F | | |



heaters with cable plastic cover

> CONTACT US


| S | |
|------------|--|
| \geq | |
| | |
| ш | |
| \vdash | |
| S | |
| > | |
| S | |
| ••• | |
| | |
| 0 | |
| | |
| £ | |
| \vdash | |
| \geq | |
| \bigcirc | |
| õ | |
| \cup | |
| ш | |
| <u> </u> | |
| | |
| | |
| \geq | |
| _ | |
| | |
| \odot | |
| | |

| Technical data | | | | |
|-------------------------------------|-----------|----|--|--|
| Storage Temperature | -40÷70 | °C | | |
| | -40÷158 | °F | | |
| UL DATA | | | | |
| UL File Number Recognized Component | E237844 | | | |
| UL Environmental Type Rating | Open Type | | | |
| UL Ambient Temperature | 50 | °C | | |
| | 122 | °F | | |



heaters with cable plastic cover

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

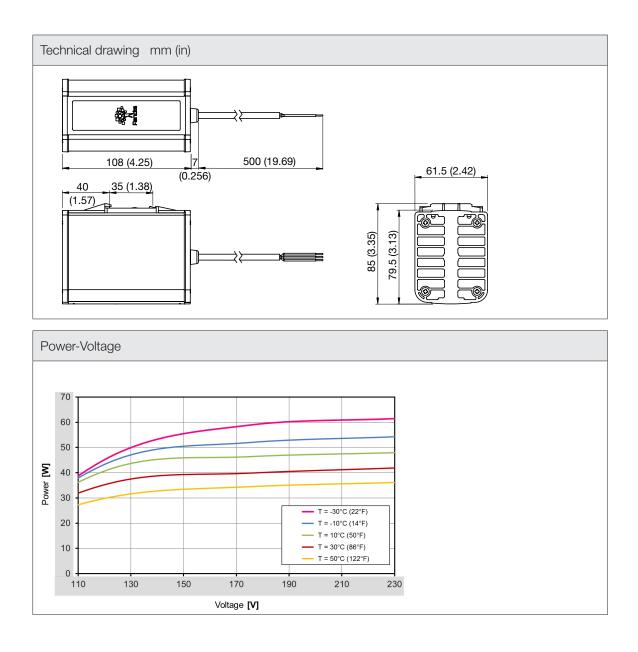



heaters with cable plastic cover

> CONTACT US

