heaters with cable plastic cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with cable connection are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

Technical data			
APPROVALS			
Approvals	CE; cURus; UKCA		
PERFORMANCE			
Heating Power	150	W	
ELECTRICAL DATA			
Rated Voltage	110-240	V a.c./d.c.	
Operating Voltage	99-264	V a.c.	
Frequency	50/60	Hz	
Max Current	6.0	A	
Appliance Class	I		
GENERIC DATA			
Casing Material	Black PET UL94 V-0		
Electrical Connection	Wires		
Wires Section	20	AWG	
Cable Length	500	mm	
	19.68	in	
Fixing System	DIN rail		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP20		
Operating Temperature	-30÷50	°C	
	-22÷122	°F	


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



heaters with cable plastic cover

> CONTACT US

Technical data		
Storage Temperature	-40÷70	°C
	-40÷158	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL Environmental Type Rating	Open Type	
UL Ambient Temperature	50	°C
	122	°F





heaters with cable plastic cover

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

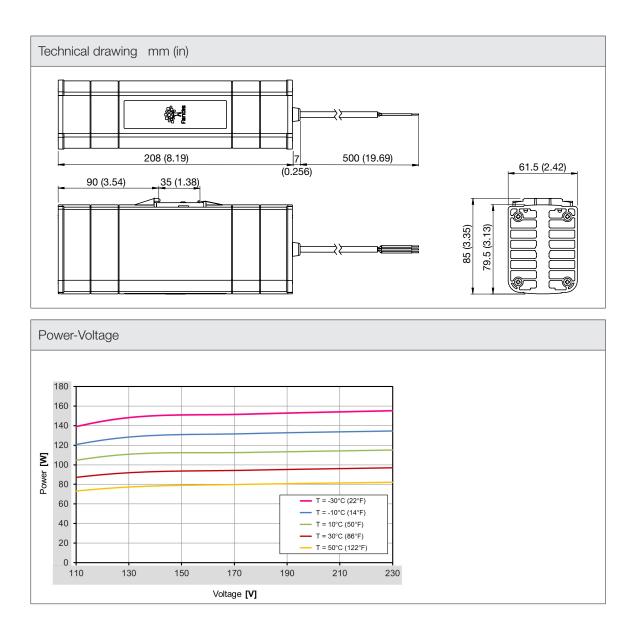


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



www.fandis.com = rev 29-09-2023 = page 3/4

heaters with cable plastic cover

> CONTACT US

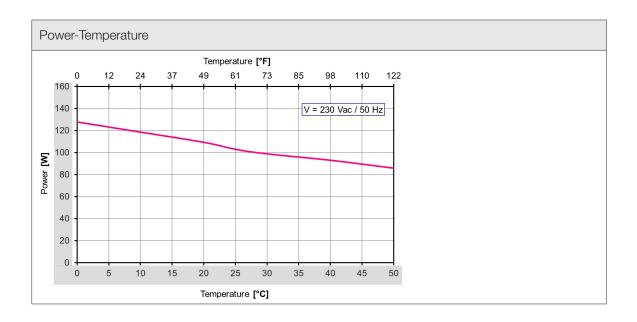


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

