heaters with terminal block metal cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with screwless terminal block are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

Technical data			
APPROVALS			
Approvals	CE; cURus; UKCA		
PERFORMANCE			
Heating Power	100	W	
ELECTRICAL DATA			
Rated Voltage	110-240	V a.c./d.c.	
Operating Voltage	99-264	V a.c.	
Frequency	50/60	Hz	
Max Current	2.6	А	
Appliance Class	I		
GENERIC DATA			
Casing Material	Black Anodised Aluminium		
Electrical Connection	Terminal Block		
Wires Section	1-2.5	mm²	
Wires Section	20-16	AWG	
Fixing System	DIN rail		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP20		
Operating Temperature	-30÷50	°C	
Operating remperature	-22÷122	°F	
Storage Temperature	-40÷70	°C	
Storage remperature	-40÷158	°F	




HTM100 heaters with terminal block metal cover


> CONTACT US

	Technical data		
	UL DATA		
	UL File Number Recognized Component	E237844	
	UL Environmental Type Rating	Open Type	
	UL Ambient Temperature	50	°C
		122	°F



> CONTACT US

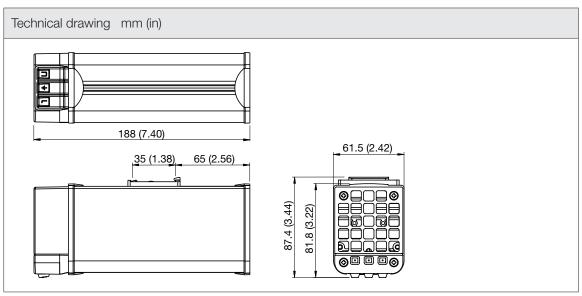

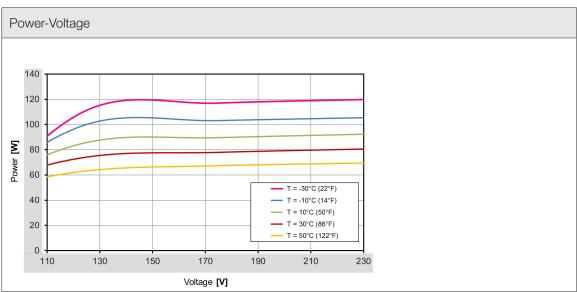



HTM100

heaters with terminal block metal cover

> CONTACT US

