


T19U230B54

standard with fan

> CONTACT US

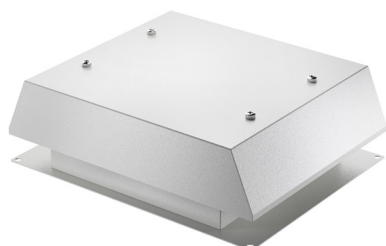

T series roof exhaust units represents an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

| Technical data | | |
|-----------------------------|---------------------|--------|
| APPROVALS | | |
| Approvals | CE; UKCA | |
| PERFORMANCE | | |
| Max Airflow | 515/565 | m³/h |
| | 303/333 | CFM |
| Airflow with Exhaust Filter | 455/495 | m³/h |
| | 268/291 | CFM |
| Max Static Pressure | 340/460 | Pa |
| | 1.36/1.85 | in H2O |
| ELECTRICAL DATA | | |
| Rated Voltage | 230 | V a.c. |
| Rated Current | 0.30/0.36 | A |
| Rated Power | 67/82 | W |
| Operating Voltage | 207-253 | V a.c. |
| Frequency | 50/60 | Hz |
| Appliance Class | I | |
| Motor Protection | Thermally Protected | |
| GENERIC DATA | | |
| Spare Parts Filter Media | M006 | |
| RAL Number | 7035 | |
| Electrical Connection | Wires | |

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

T19U230B54

standard with fan

> CONTACT US

| Technical data | | |
|--------------------------------|---|--------------------------|
| Life Expectancy | 62000/70000 62000/70000 | h at 25 °C h at 77 °F |
| Wires Section | 1 | mm² |
| Wires Section | 18 | AWG |
| Fan Noise | 62/64 | dB(A) |
| Filter Class | G3 | EN 779 |
| Filter Class | ISO coarse 55% | ISO 16890 |
| Filter Material | thermo-linked progressive structure synthetic fibre | |
| ENVIRONMENTAL AND THERMAL DATA | | |
| IP Protection Degree | IP54 | |
| Operating Temperature | -20÷60 | °C |
| | -4÷140 | °F |
| Storage Temperature | -20÷80 | °C |
| | -4÷176 | °F |


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

T19U230B54

standard with fan

> CONTACT US

Technical drawing mm (in)

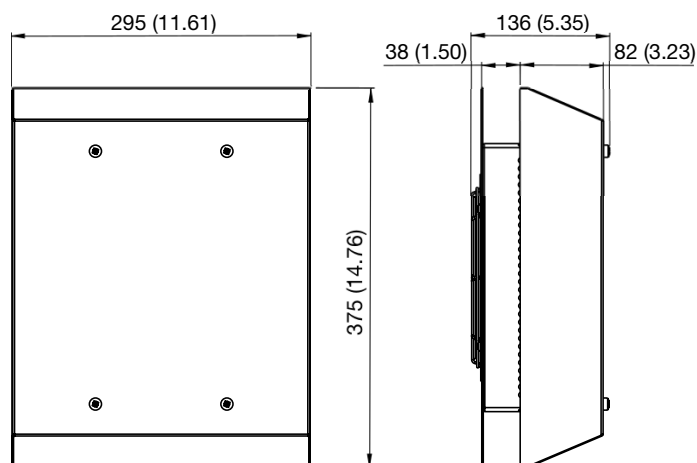

Mounting cut-out mm (in)

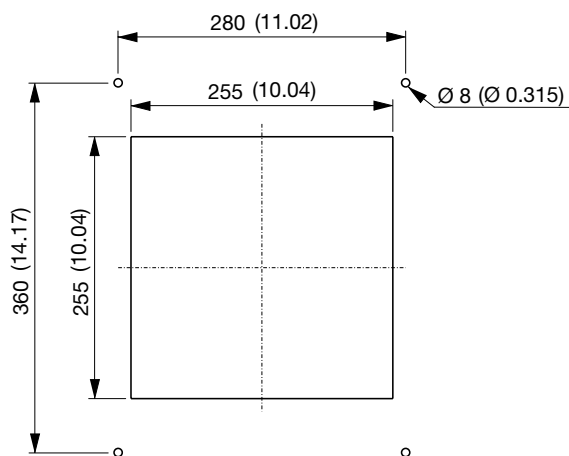


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

T19U230B54

standard with fan

> CONTACT US

VENTILATION SYSTEMS

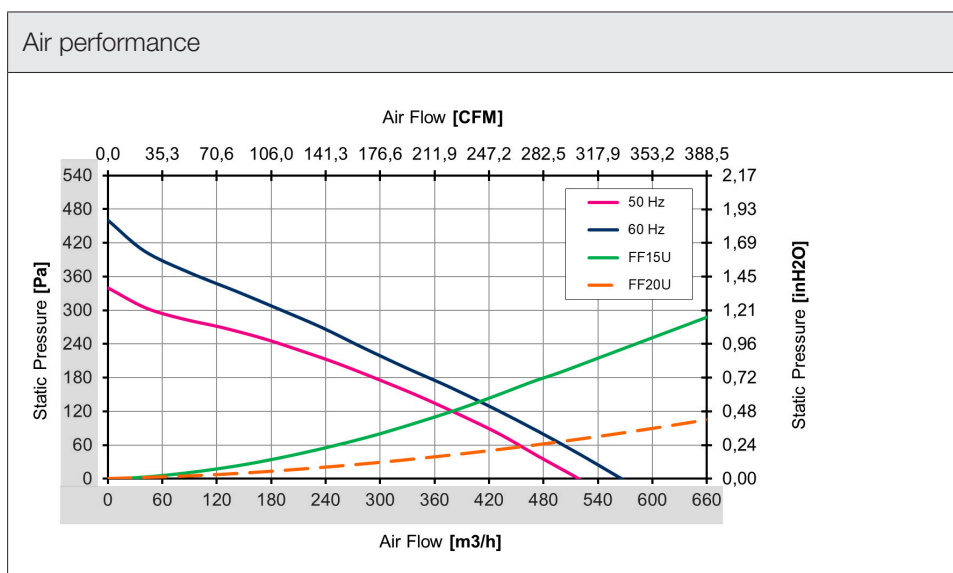


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.