standard with fan

> CONTACT US



T series roof exhaust units represents an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	715/750	m³/h
	421/441	CFM
Airflow with Exhaust Filter	600/620	m³/h
	353/365	CFM
Max Static Pressure	452/569	Pa
	1.81/2.28	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.57/0.74	А
Rated Power	128/170	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Spare Parts Filter Media	M006	
RAL Number	7035	
Electrical Connection	Wires	



standard with fan


> CONTACT US


Technical data			
Life Expectancy	65000/62500	h at 40 °C	
	65000/62500	h at 104 °F	
Wires Section	1	mm²	
Wires Section	18	AWG	
Fan Noise	72/73	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-20÷60	°C	
	-4÷140	°F	
Storage Temperature	-20÷80	°C	
	-4÷176	°F	



standard with fan

> CONTACT US

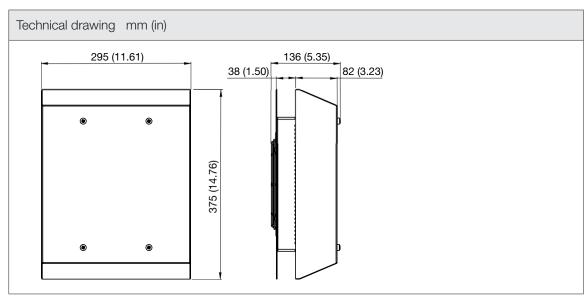

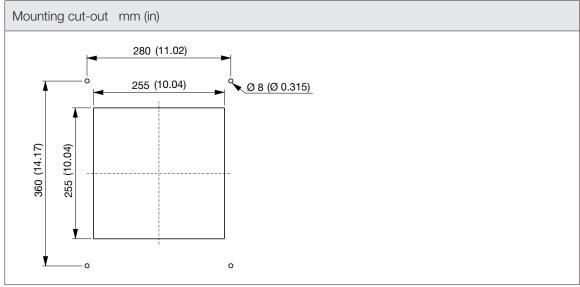



standard with fan

> CONTACT US

