

TP19N230B541

AC

> CONTATTACI



The TP series roof-mounted exhaust units provide an effective solution for dissipating heat from the top section of electrical panels. Suitable for both indoor and outdoor applications, they ensure high airflow performance even in confined spaces where wall-mounted installation is not possible. Depending on environmental conditions, they can be combined with one or more filters to enable either natural convection or forced air cooling.

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	420/490	m ³ /h
	247/288	CFM
Airflow with Exhaust Filter	380/440	m ³ /h
	224/259	CFM
Max Static Pressure	340/480	Pa
	1.36/1.93	in H ₂ O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.31/0.36	A
Rated Power	70/81	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Spare Parts Filter Media	M117-TP19	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

TP19N230B541

AC

> CONTATTACI

Technical data		
Weight	2.61	Kg
	5.76	lb
RAL Number	9005	
Life Expectancy	62000/70000	h at 25 °C
	62000/70000	h at 77 °F
Electrical Connection	Terminal Block	
Wires Section	1-4	mm ²
Wires Section	16-12	AWG
Fan Noise	67.9/71	dB(A)
Filter Class	G2	EN 779
Filter Class	ISO coarse 30%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
Operating Temperature	-10÷55	°C
	14÷131	°F
Storage Temperature	-20÷60	°C
	-4÷140	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL File Number Listed	E500932	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	55	°C
	131	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

TP19N230B541

AC

> CONTATTACI

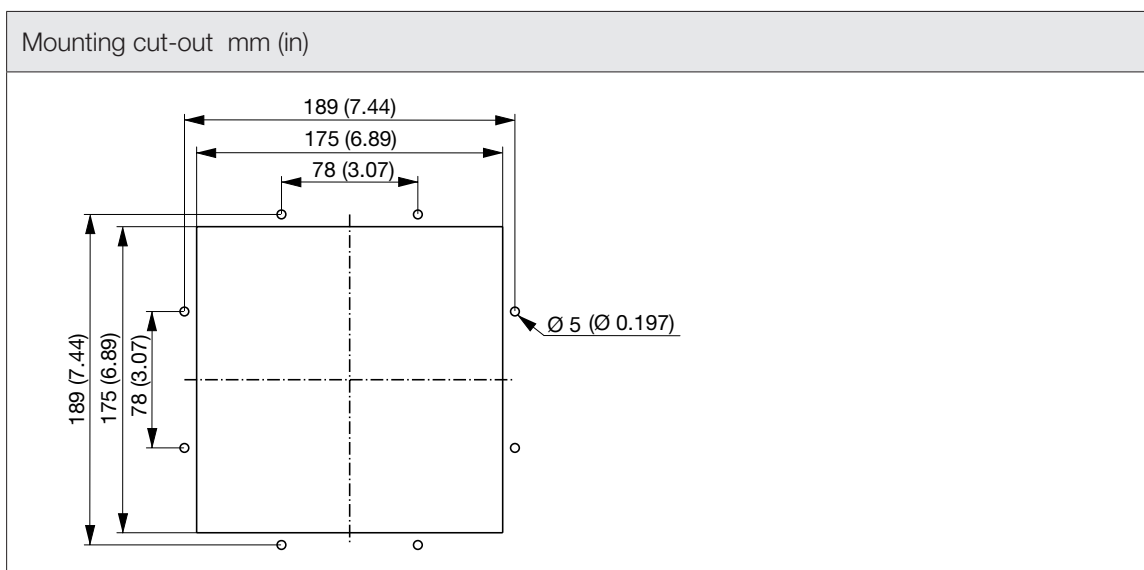
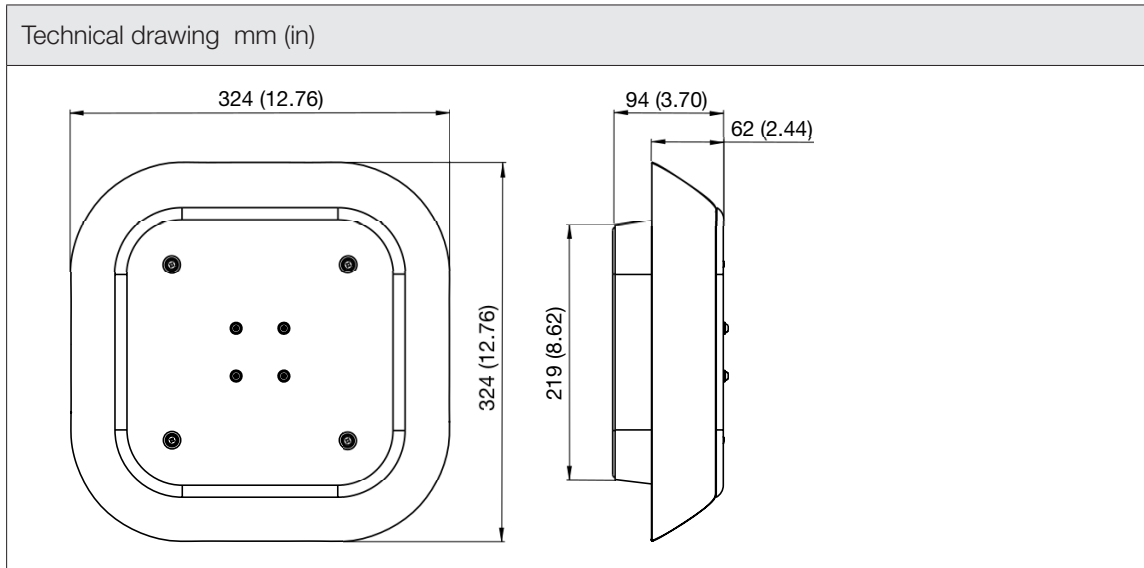


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

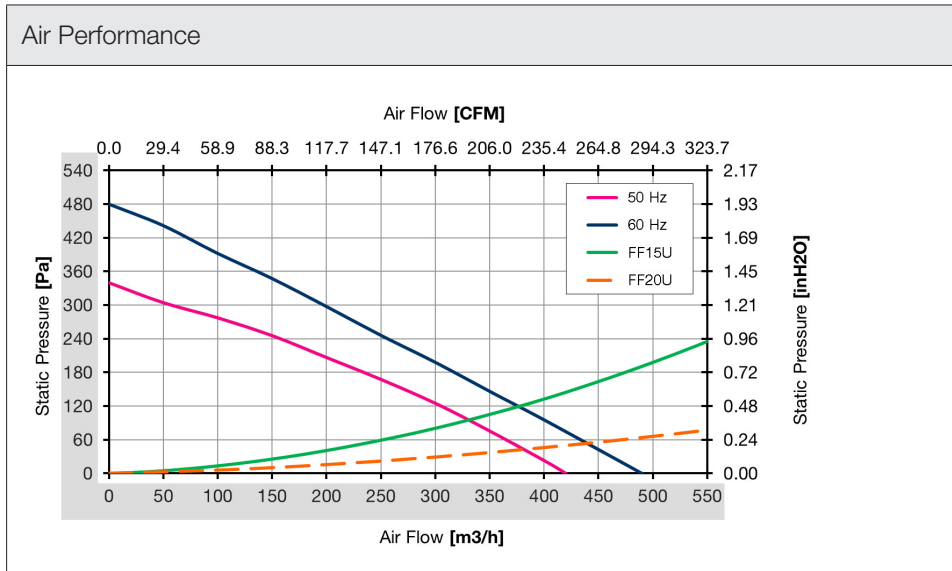


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla