TP19U115B AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	500/575	m³/h
	294/338	CFM
Airflow with Exhaust Filter	445/505	m³/h
	262/297	CFM
Max Static Pressure	335/465	Pa
	1.34/1.87	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.53/0.64	А
Rated Power	59/73	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Weight	2.52	Kg
	5.55	lb
RAL Number	7035	
Electrical Connection	Terminal Block	



TP19U115B AC

> CONTACT US


Technical data			
Life Expectancy	70000/70000	h at 25 °C	
	70000/70000	h at 77 °F	
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	63/64	dB(A)	
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP24		
Operating Temperature	-10÷60	°C	
	14÷140	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	




TP19U115B

AC

> CONTACT US

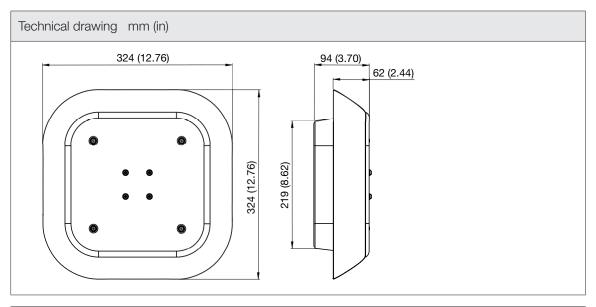

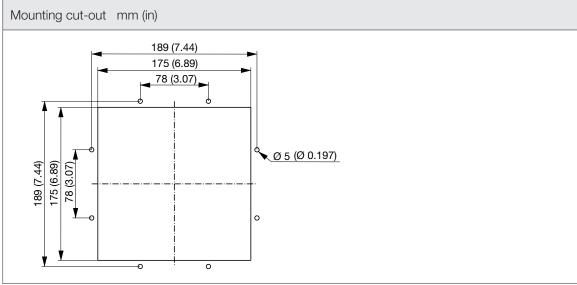



TP19U115B AC

> CONTACT US

