AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	/560	m³/h
	/330	CFM
Airflow with Exhaust Filter	/495	m³/h
	/291	CFM
Max Static Pressure	/470	Pa
	/1.89	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.85	А
Rated Power	97	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
GENERIC DATA		
Weight	2.65	Kg
	5.84	lb
RAL Number	7035	
Electrical Connection	Terminal Block	



AC


> CONTACT US


Technical data			
Life Expectancy	48000	h at 25 °C	
	48000	h at 77 °F	
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	65	dB(A)	
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP44		
Operating Temperature	-10÷55	°C	
	14÷131	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	
UL DATA			
UL File Number Recognized Component	E237844		
UL File Number Listed	E500932		
UL Environmental Type Rating	Type 12		
UL Ambient Temperature	55	°C	
	131	°F	



AC


> CONTACT US

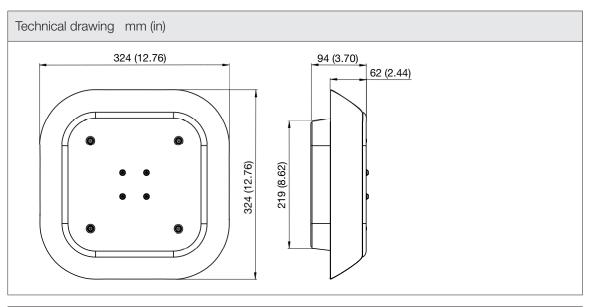

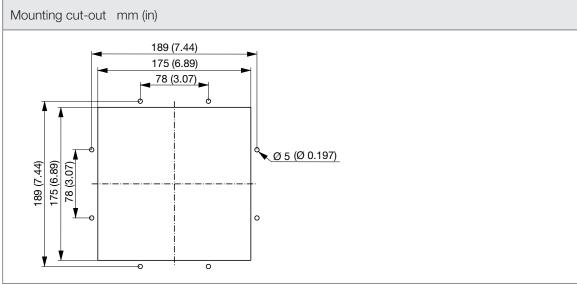



> CONTACT US

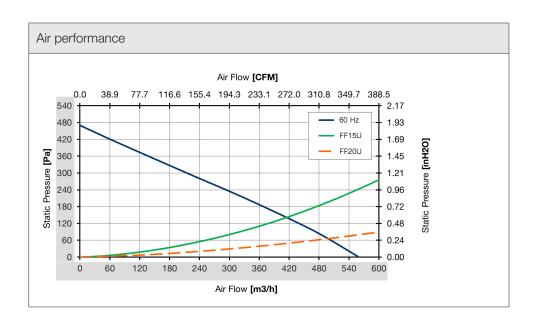

AC

