AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	/490	m³/h
	/288	CFM
Airflow with Exhaust Filter	/440	m³/h
	/259	CFM
Max Static Pressure	/480	Pa
	/1.93	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.85	А
Rated Power	/97	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Spare Parts Filter Media	M117-TP19	
Weight	2.66	Kg
	5.86	lb
RAL Number	7035	



AC


> CONTACT US


Technical data		
Electrical Connection	Terminal Block	
Life Expectancy	48000	h at 25 °C
	48000	h at 77 °F
Wires Section	1-4	mm²
Wires Section	16-12	AWG
Fan Noise	65	dB(A)
Filter Class	G2	EN 779
Filter Class	ISO coarse 30%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
Operating Temperature	-10÷55	°C
	14÷131	°F
Storage Temperature	-20÷60	°C
	-4÷140	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL File Number Listed	E500932	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	55	°C
	131	°F



AC


> CONTACT US

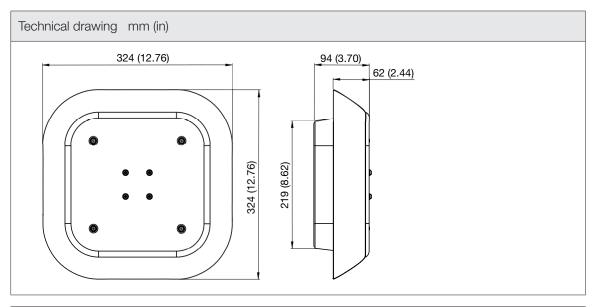

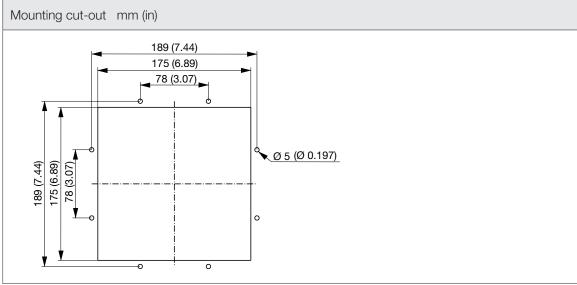



> CONTACT US

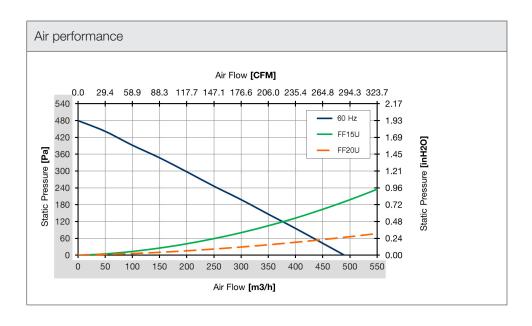

AC

