TP19U115B55

AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	420/490	m³/h
	247/288	CFM
Airflow with Exhaust Filter	360/410	m³/h
	212/241	CFM
Max Static Pressure	340/480	Pa
	1.36/1.93	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.53/0.55	А
Rated Power	58/72	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Spare Parts Filter Media	M117-TP19	
Weight	2.63	Kg
	5.80	lb
RAL Number	7035	



TP19U115B55 AC

> CONTACT US


Technical data			
Electrical Connection	Terminal Block		
Life Expectancy	70000/70000	h at 25 °C	
	70000/70000	h at 77 °F	
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	63/64	dB(A)	
Filter Class	G2	EN 779	
Filter Class	ISO coarse 30%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-10÷60	°C	
	14÷140	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	




TP19U115B55

AC

> CONTACT US

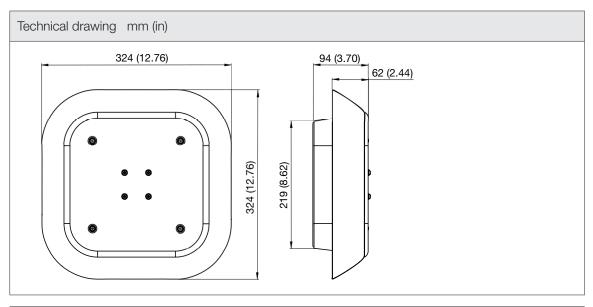

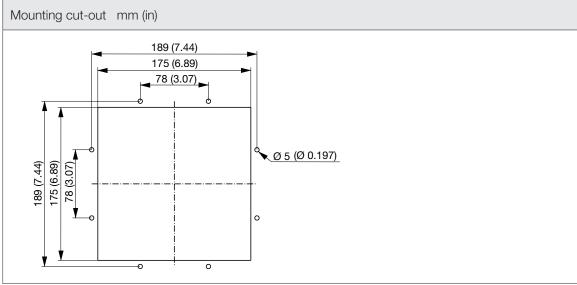



TP19U115B55 AC

> CONTACT US

