AC

> CONTATTACI



The TP series roof-mounted exhaust units provide an effective solution for dissipating heat from the top section of electrical panels. Suitable for both indoor and outdoor applications, they ensure high airflow performance even in confined spaces where wall-mounted installation is not possible. Depending on environmental conditions, they can be combined with one or more filters to enable either natural convection or forced air cooling.

Technical data			
APPROVALS			
Approvals	CE; cURus; cULus; cCSAus; UKCA		
PERFORMANCE			
Max Airflow	485/560	m³/h	
	285/330	CFM	
Airflow with Exhaust Filter	430/495	m³/h	
	253/291	CFM	
Max Static Pressure	330/470	Pa	
	1.32/1.89	in H2O	
ELECTRICAL DATA			
Rated Voltage	230	V a.c.	
Rated Current	0.31/0.36	А	
Rated Power	70/81	W	
Operating Voltage	207-253	V a.c.	
Frequency	50/60	Hz	
Appliance Class	1		
Motor Protection	Thermally Protected		
MECHANICAL DATA			
Bearing	Ball Bearing		
GENERIC DATA			
Weight	2.61	Kg	
	5.75	lb	



AC


> CONTATTACI


Technical data		
RAL Number	7035	
Life Expectancy	62000/70000	h at 25 °C
	62000/70000	h at 77 °F
Electrical Connection	Terminal Block	
Wires Section	1-4	mm²
Wires Section	16-12	AWG
Fan Noise	67.9/71	dB(A)
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP44	
Operating Temperature	-10÷55	°C
	14÷131	°F
Storage Temperature	-20÷60	°C
	-4÷140	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL File Number Listed	E500932	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	55	°C
	131	°F



AC

> CONTATTACI

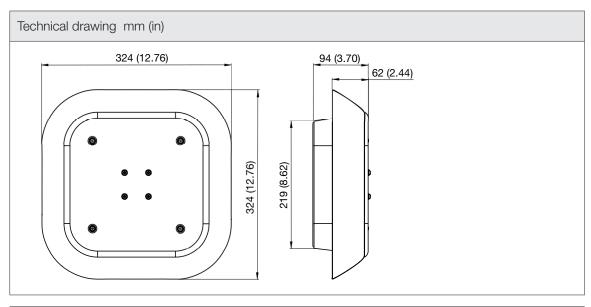

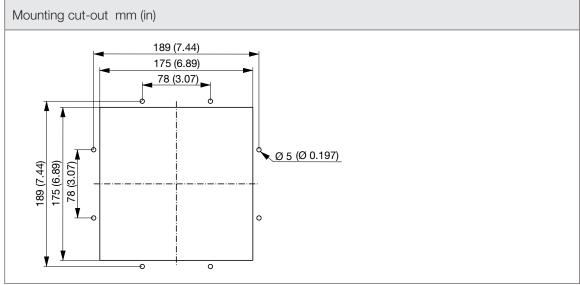



AC

> CONTATTACI

