TP19U230B55

AC

> CONTATTACI



The TP series roof-mounted exhaust units provide an effective solution for dissipating heat from the top section of electrical panels. Suitable for both indoor and outdoor applications, they ensure high airflow performance even in confined spaces where wall-mounted installation is not possible. Depending on environmental conditions, they can be combined with one or more filters to enable either natural convection or forced air cooling.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	440/475	m³/h
	259/280	CFM
Airflow with Exhaust Filter	370/405	m³/h
	218/238	CFM
Max Static Pressure	343/459	Pa
	1.38/1.84	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.30/0.37	А
Rated Power	68/86	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Spare Parts Filter Media	M117-TP19	



**TP19U230B55** AC

> CONTATTACI


Technical data			
Weight	2.65	Kg	
	5.83	lb	
RAL Number	7035		
Life Expectancy	62000/70000		
Electrical Connection	Terminal Block		
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	67.9/71	dB(A)	
Filter Class	G2	EN 779	
Filter Class	ISO coarse 30%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
Fixing System	Screws		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-10÷60	°C	
	14÷140	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	




TP19U230B55

AC

> CONTATTACI

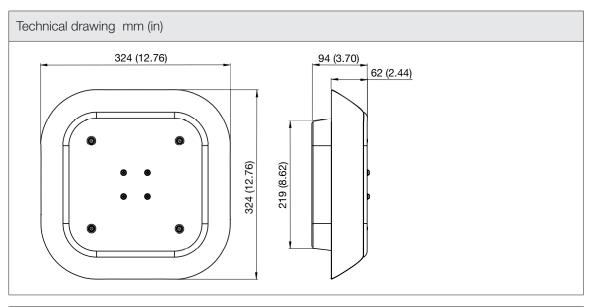

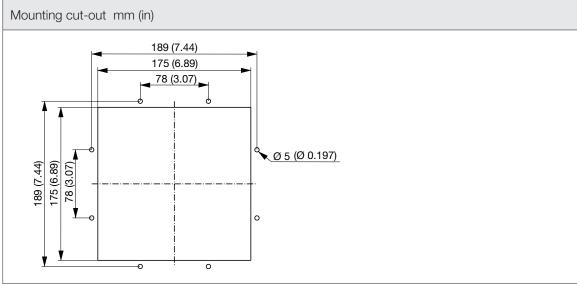



**TP19U230B55** AC

> CONTATTACI

