TP19U230B551

AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	420/490	m³/h
	247/288	CFM
Airflow with Exhaust Filter	360/410	m³/h
	212/241	CFM
Max Static Pressure	340/480	Pa
	1.36/1.93	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.31/0.36	А
Rated Power	70/81	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Spare Parts Filter Media	M117-TP19	
Weight	2.62	Kg
	5.78	lb
RAL Number	7035	



TP19U230B551

AC

> CONTACT US


Technical data			
Electrical Connection	Terminal Block		
Life Expectancy	62000/70000	h at 25 °C	
	62000/70000	h at 77 °F	
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	67.9/71	dB(A)	
Filter Class	G2	EN 779	
Filter Class	ISO coarse 30%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-10÷55	°C	
	14÷131	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	
UL DATA			
UL File Number Recognized Component	E237844		
UL File Number Listed	E500932		
UL Environmental Type Rating	Type 12		
UL Ambient Temperature	55	°C	
	131	°F	




TP19U230B551

AC

> CONTACT US

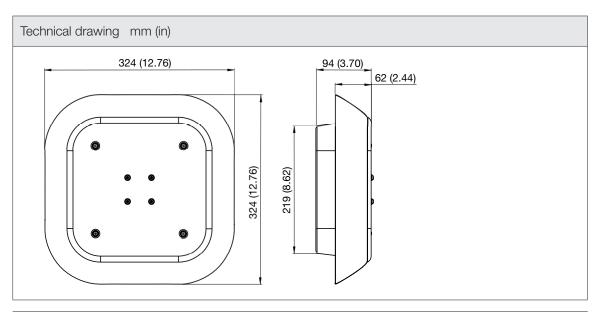

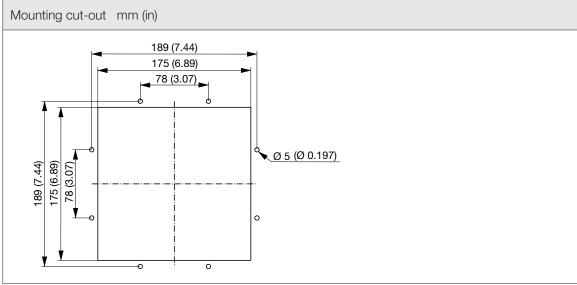



**TP19U230B551** AC

> CONTACT US

