virdis

TP19UD24B44

DC

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

| Technical data | | |
|-----------------------------|--------------------------|----------------------|
| APPROVALS | | |
| Approvals | CE; UKCA | |
| PERFORMANCE | | |
| Max Airflow | 600 | m³/h |
| | 353 | CFM |
| Airflow with Exhaust Filter | 530 | m³/h |
| | 312 | CFM |
| Max Static Pressure | 435 | Pa |
| | 1.75 | in H2O |
| ELECTRICAL DATA | | |
| Tachometer Output | 3 | pulse/ revolution |
| Rated Voltage | 24 | V d.c. |
| Rated Current | 3.91 | A |
| Rated Power | 93 | W |
| Operating Voltage | 16-28 | V d.c. |
| Motor Protection | Electronically Protected | |
| GENERIC DATA | | |
| Weight | 2.51 | Kg |
| | 5.54 | dl |
| RAL Number | 7035 | |
| Electrical Connection | Terminal Block | |



DC

TP19UD24B44

virdis

> CONTACT US

VENTILATION SYSTEMS

| Technical data | | |
|------------------------------|----------------|-----------------|
| Life Expectancy | 20000 | h at 55 °C |
| | 20000 | h at 131 ° |
| Wires Section | 1-4 | mm ² |
| Wires Section | 16-12 | AWG |
| Fan Noise | 63.0 | dB(A) |
| Filter Class | G2 | EN 779 |
| Filter Class | ISO coarse 30% | ISO 1689 |
| ENVIRONMENTAL AND THERMAL DA | ГА | |
| IP Protection Degree | IP44 | |
| Operating Temperature | -20÷55 | °C |
| | -4÷131 | °F |
| Storage Temperature | -25÷60 | °C |
| | -13÷140 | °F |






virdis

TP19UD24B44

DC

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

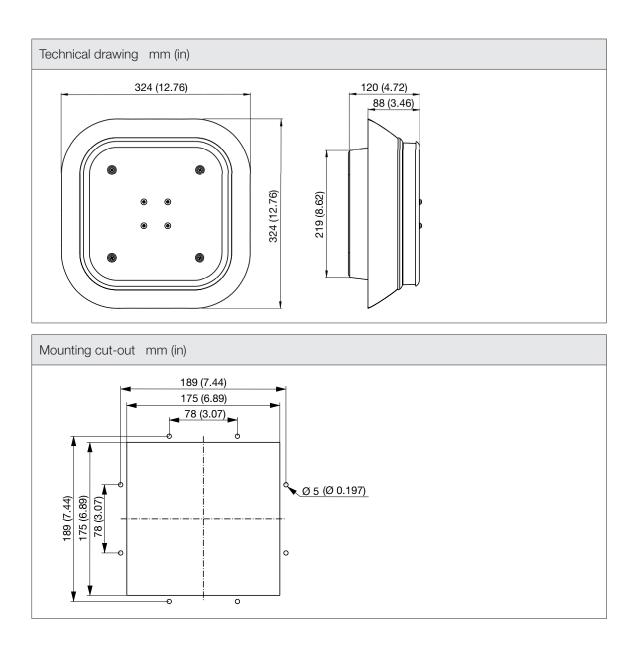



virdis

TP19UD24B44

DC

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

