TP19UD24B55

DC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Max Airflow	543	m³/h	
	320	CFM	
Airflow with Exhaust Filter	455	m³/h	
	268	CFM	
Max Static Pressure	435	Pa	
	1.75	in H2O	
ELECTRICAL DATA			
Tachometer Output	3	pulse/ revolution	
Rated Voltage	24	V d.c.	
Rated Current	3.86	А	
Rated Power	92	W	
Operating Voltage	16-28	V d.c.	
Motor Protection	Electronically Protected		
GENERIC DATA			
Spare Parts Filter Media	M117-TP19		
Weight	2.53	Kg	
	5.57	lb	
RAL Number	7035		
Electrical Connection	Terminal Block		



**TP19UD24B55** DC


> CONTACT US


Technical data			
Life Expectancy	20000	h at 55 °C	
	20000	h at 131 °F	
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	63.0	dB(A)	
Filter Class	G2	EN 779	
Filter Class	ISO coarse 30%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-20÷55	°C	
	-4÷131	°F	
Storage Temperature	-25÷60	°C	
	-13÷140	°F	



**TP19UD24B55** DC

> CONTACT US

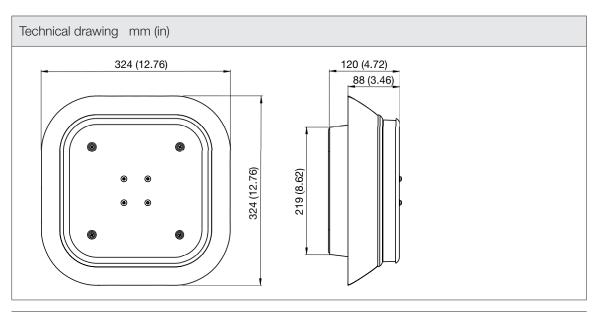

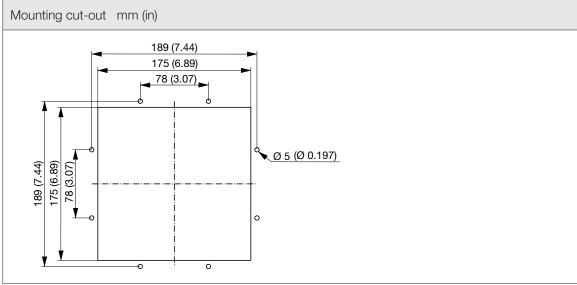



**TP19UD24B55** DC

> CONTACT US

