

OF-A12R23HWBWQ135

AC orientable fan

> CONTACT US



The swivelling fans can be adjusted to cool down particularly hot spots and ensure a good distribution of air inside the electrical panel. It was designed together with a metal support to facilitate installation in vertical or horizontal positions, depending on the need.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	140/182	m³/h
	82/107	CFM
Max Static Pressure	62/80	Pa
	0.25/0.32	in H2O
RPM	2650/3050	RPM
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.105/0.1	A
Rated Power	20/19	W
Operating Voltage	216-244	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Insulation Class	A	
Motor Protection	Impedance Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Casing Material	Die-Casting Aluminium	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

OF-A12R23HWBWQ135

AC orientable fan

> CONTACT US

ELECTRO-TECHNICAL SYSTEMS

Technical data		
Life Expectancy	30000	h at 40 °C
	30000	h at 104 °F
Airflow Direction	Air intake over brackets	
Electrical Connection	Screwless Terminal Block	
Fan Noise	46/49	dB(A)
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP20	
Operating Temperature	-10÷60	°C
	14÷140	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

OF-A12R23HWBWQ135

AC orientable fan

> CONTACT US

Technical drawing mm (in)

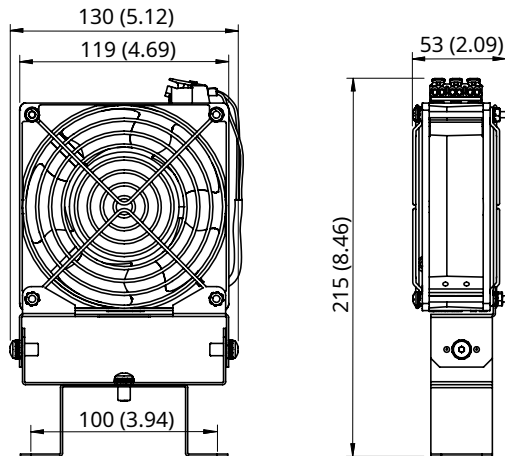

Air Performance

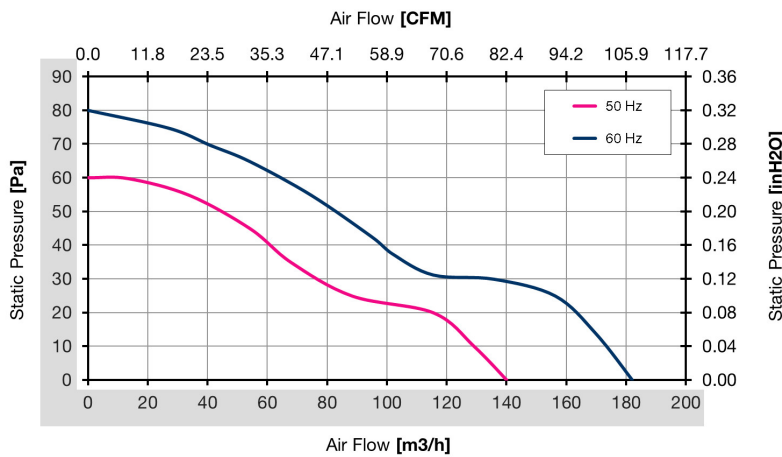


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.