CCU08A231WNIUU

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; cULus; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	855/935	W
	2917/3190	BTU/h
Cooling Capacity L35L50	685/715	W
	2337/2440	BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	3.2/3.2	А
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	2.5-14.8	А
Fuse T	20	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	280	g
GWP	631	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla



COOLING UNITS Wall Mounting



CCU08A231WNIUU

indoor

> CONTATTACI

Technical data			
CO2e	0.18	t	
Maximum Allowable Pressure	HP 377 Psig (26.0 bar) / LP 88 Psig (6.0 bar)		
ENVIRONMENTAL AND THERMAL DATA			
Protection Degree Internal Circuit	IP54		
Operating Temperature	20÷55	°C	
	68÷131	°F	
UL DATA			
UL File Number Listed	SA46405		
UL Environmental Type Rating	Type 12, pending		



CCU08A231WNIUU

indoor

> CONTATTACI

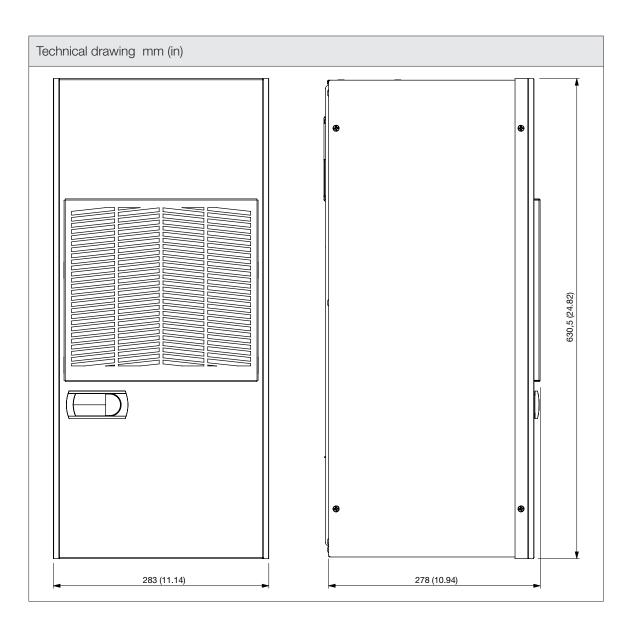



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla



CCU08A231WNIUU

indoor

> CONTATTACI

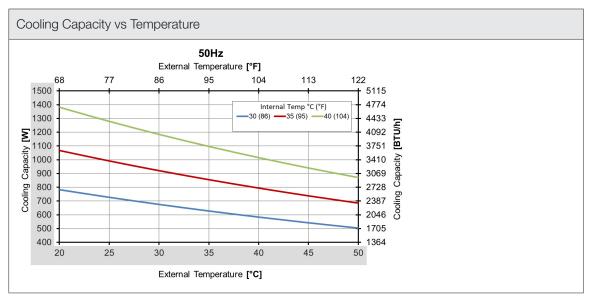

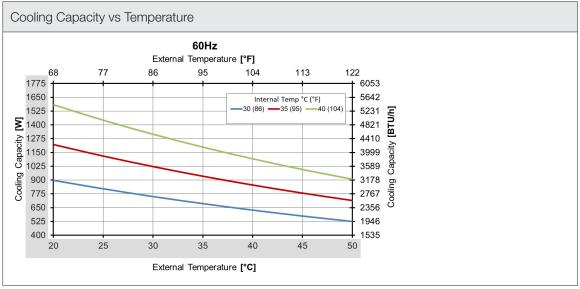


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

