

CCU08A231WN04X

outdoor

&gt; CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	855/935 2917/3190	W BTU/h
Cooling Capacity L35L50	685/715 2337/2440	W BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	2.9/3.2	A
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	17	A
Fuse T	6	A
GENERIC DATA		
Casing Material	Stainless Steel	AISI 304
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	250	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A231WN04X

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP55	
Operating Temperature	-20÷55	°C
	-4÷131	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A231WN04X

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

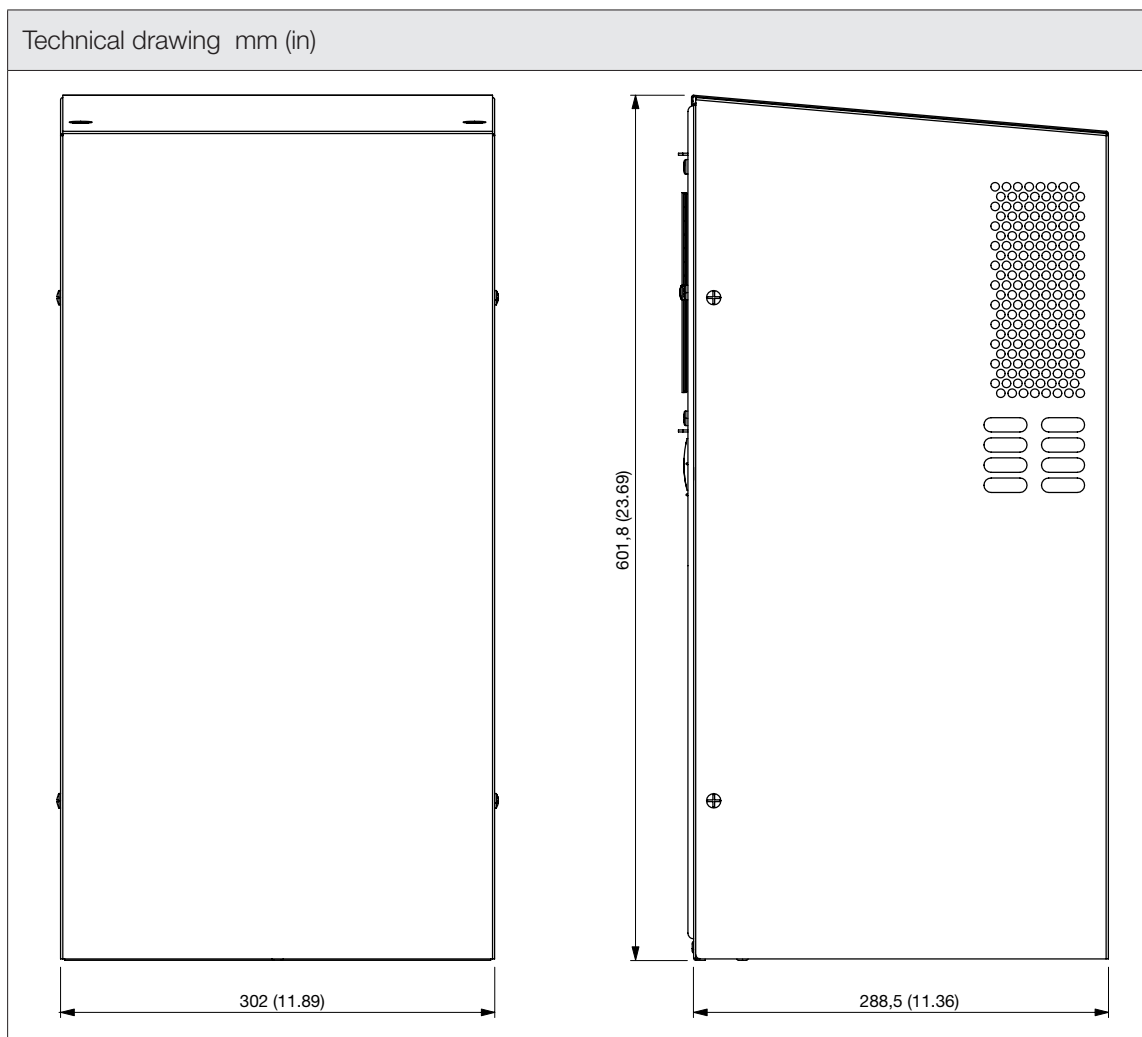



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A231WN04X

outdoor

> CONTATTACI

Cooling Capacity vs Temperature

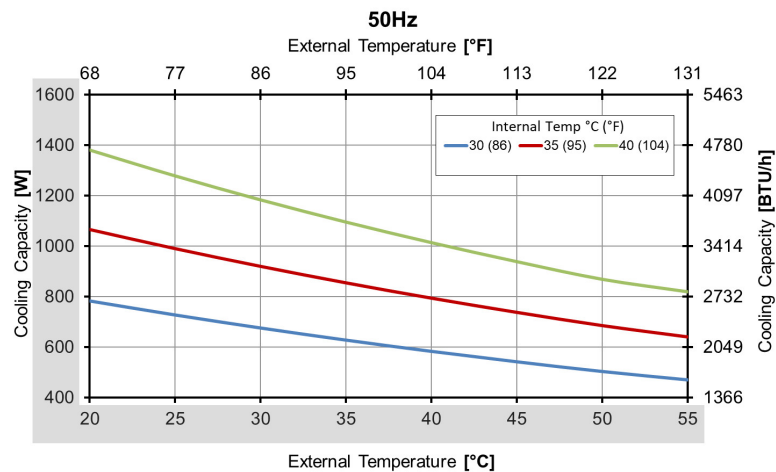

Cooling Capacity vs Temperature

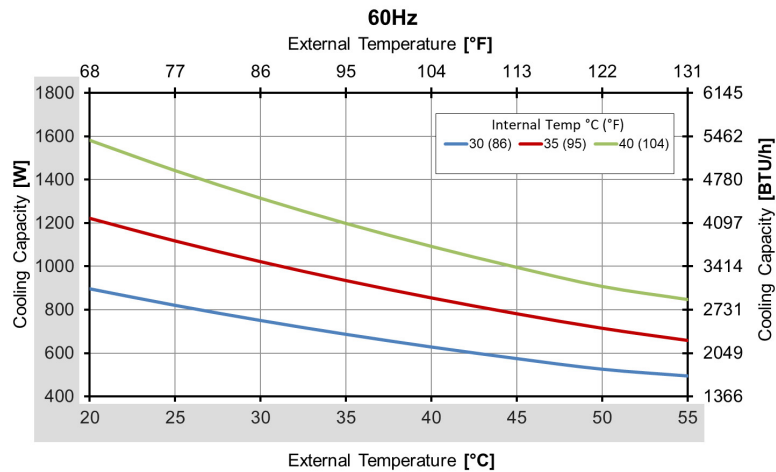


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla