

CCU08A402WNIUX

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	825/895 2815/3054	W BTU/h
Cooling Capacity L35L50	645/685 2201/2337	W BTU/h
ELECTRICAL DATA		
Rated Voltage	380/400/440/460/480	V a.c. 2 ~ at 50/60 Hz
Rated Current	1.8/2	A at 380 V a.c. 2 ~
Rated Current	1.7/1.9	A at 400 V a.c. 2 ~
Rated Current	1.6/1.8	A at 440 V a.c. 2 ~
Rated Current	1.5/1.7	A at 460 V a.c. 2 ~
Rated Current	1.5/1.6	A at 480 V a.c. 2 ~
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	9	A
Fuse T	6	A
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A402WNIUX

indoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

Technical data		
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	230	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP54	
Operating Temperature	20÷50	°C
	68÷122	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A402WNIUX

indoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

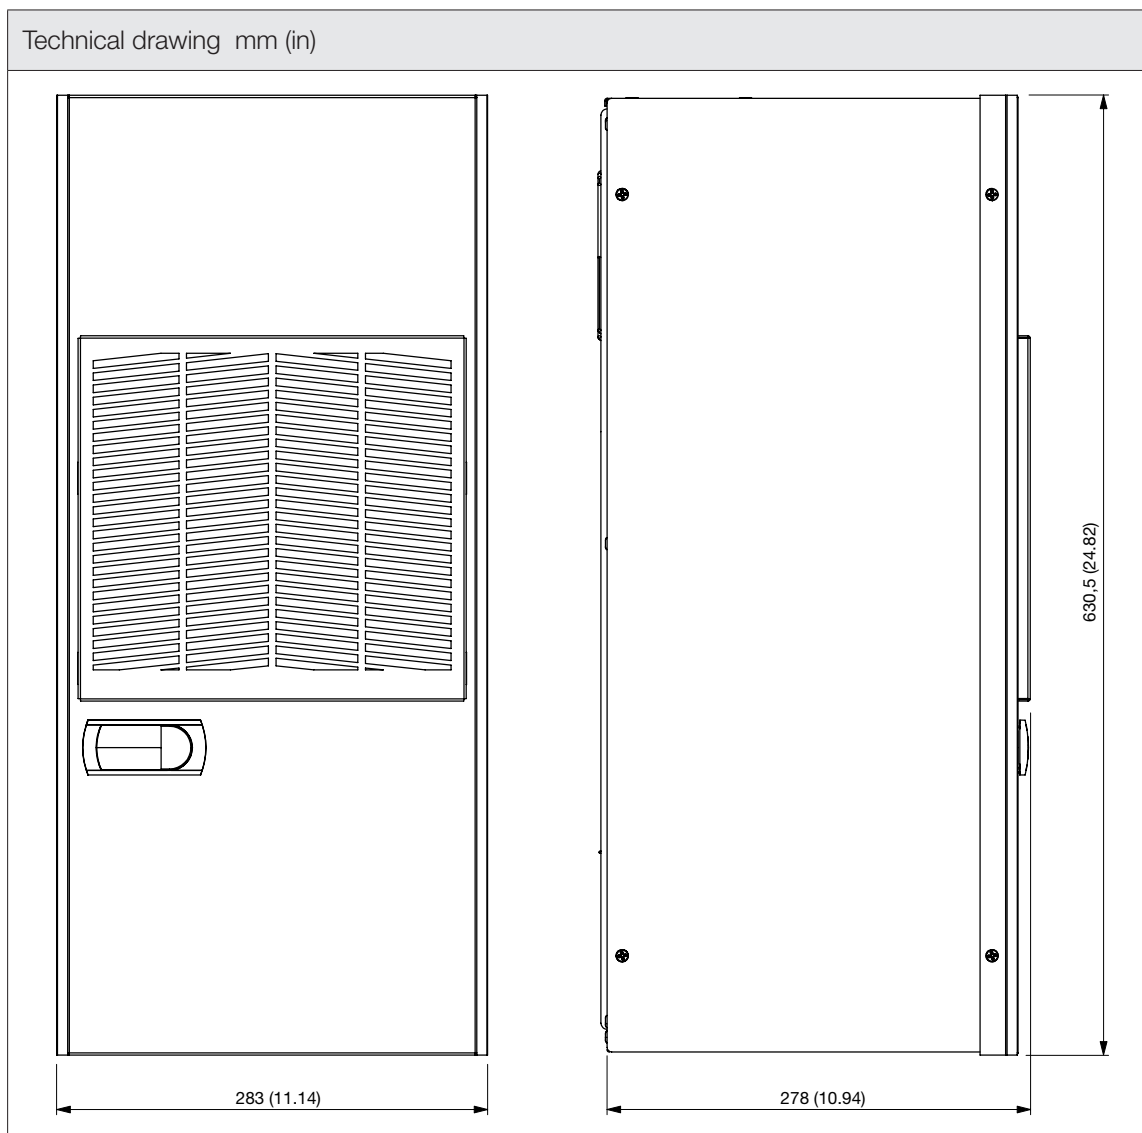



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU08A402WNIUX

indoor

> CONTATTACI

Cooling Capacity vs Temperature

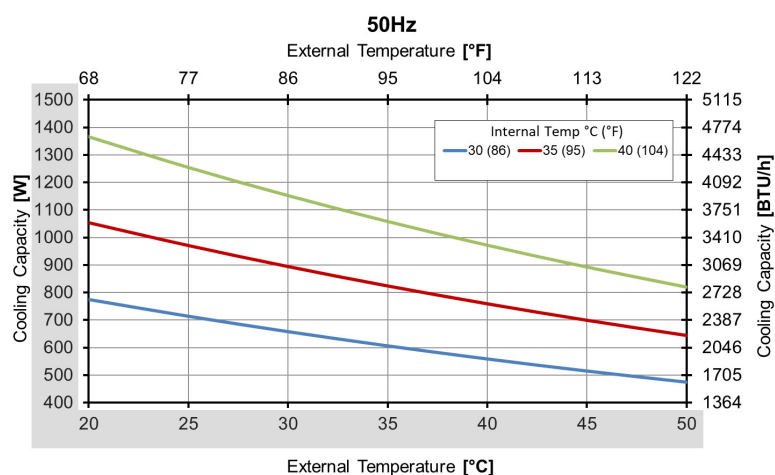

Cooling Capacity vs Temperature

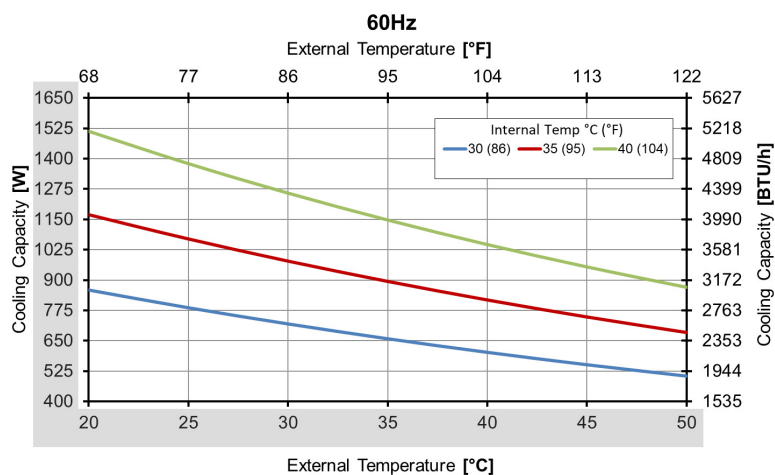


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla