standard with fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	830/930	m³/h
	489/547	CFM
Airflow with Exhaust Filter	650/705	m³/h
	383/415	CFM
Max Static Pressure	280/255	Pa
	1.12/1.02	in H2O
ELECTRICAL DATA		
Rated Voltage	115	Va.c.
Rated Current	1.1/1.1	А
Rated Power	124/124	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
Bearing	Ball Bearing	



FF20GA115UERA

standard with fan

> CONTACT US


Technical data		
GENERIC DATA		
Spare Parts Filter Media	M20-EU2-01	
Casing Material	PC/ABS UL94 V-0	
RAL Number	7035	
Life Expectancy	62000/70000	h at 25 °C
	62000/70000	h at 77 °F
Airflow Direction	Reverse	
Electrical Connection	Screwless Terminal Block	
Wires Section	0.75-2.5	mm²
Wires Section	20-14	AWG
Fan Noise	67.8/72	dB(A)
Filter Class	G2	EN 779
Filter Class	ISO coarse 30%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP51	
O a series Tanana da series da serie	-30÷60	°C
Operating Temperature	-22÷140	°F
Storage Temperature	-30÷70	°C
	-22÷158	°F




FF20GA115UERA

standard with fan

> CONTACT US

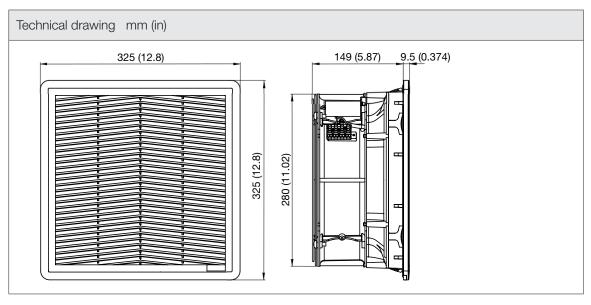

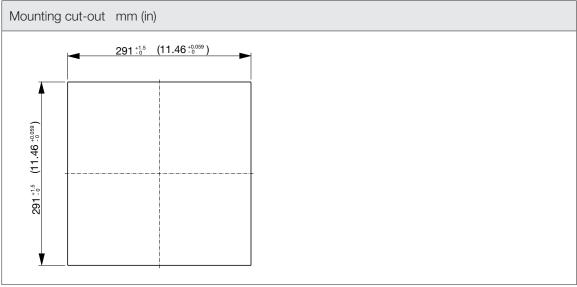



FF20GA115UERA

standard with fan

> CONTACT US

