virdis

T22R230B

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US



T series roof exhaust units represents an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	800/850	m³/h
	471/500	CFM
Airflow with Exhaust Filter	660/700	m³/h
	388/412	CFM
Max Static Pressure	435/548	Pa
	1.75/2.20	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.56/0.7	A
Rated Power	125/161	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class		
Motor Protection	Thermally Protected	
GENERIC DATA		
RAL Number	7032	
Electrical Connection	Wires	
Life Expectancy	65000/62500	h at 40 °C
	65000/62500	h at 104 °F



T22R230B

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

Technical data			
Wires Section	1	mm ²	
Fan Noise	72/73	dB(A)	
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP23		
Operating Temperature	-20÷60	°C	
	-4÷140	°F	
Storage Temperature	-30÷70	°C	
	-22÷158	°F	

virdis






virdis

T22R230B

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

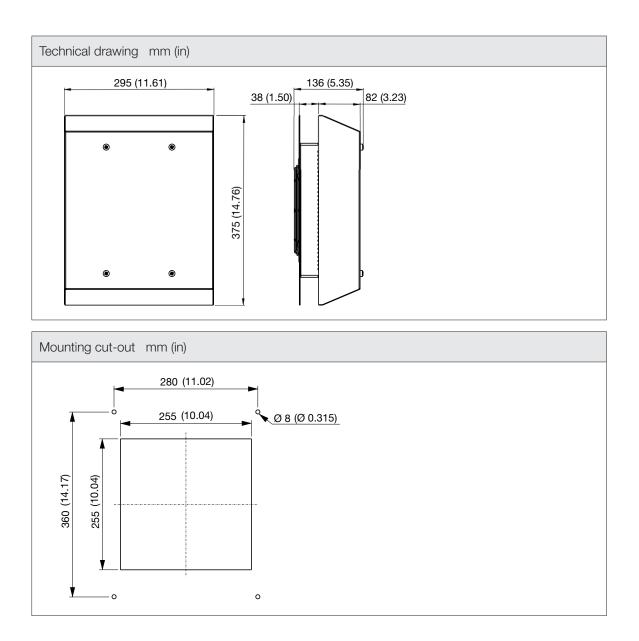





virdis

T22R230B

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

